


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

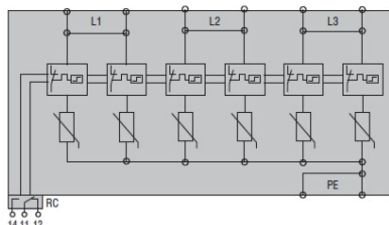

**LOVATO DESCARCATOR TIP 1 SI 2 MODNOBLOC, IEC IMPULSE
CURRENT IIMP (10/350ÎCS) 25KA PER POLE, 3P. CU CONTACT
COMANDA DE LA DISTANTA**

Cod producator Lovato: Surge Protection Device (SPD)
Tip produs: SA1B
Operating voltage type: AC
Application: AC Power lines
Numar de poli: 3P
Number of DIN modules: 6
Relay output: Da
SPD according to IEC/EN 61643-11: Da
Rated operational voltage AC (IEC): VAC 230 / 400
Maximum continuous voltage (IEC) U_c : V 320
Impulse current (IEC) I_{imp} 10/350 (L-N/N-PE): kA 25
Maximum discharge current (IEC) I_{max} 8/20 (L-N/N-PE): kA 100
Rated discharge current (IEC) I_n 8/20 (L-N/N-PE): kA 25
Voltage protection level (IEC) U_p (L-N/N-PE):
Temporary overvoltage (TOV) resistance U_t (L-N for 5s): V 335
Residual voltage (IEC) U_{res} (L-N/N-PE) at 5kA (8/20): kV 1.1
Follow current (IEC) I_f (N-PE) rms: A No
Tripping time t_a (L-N/N-PE): ns
Thermal isolation protection: Da
Backup protection fuse (IEC) with supply line fuse >250A (L-N/N-PE): 250A gL/gG
Maximum short circuit current (IEC) at 50Hz: kA 50
Status indicator - operating / end of life: Frontal indication/Aux contact
Max altitude: m 2000
Mounting: Din rail
Tightening torque for terminals max: Nm 3
Conductor section - Flexible max (IEC): mm² 25
Conductor section - Rigid max (IEC): mm² 35
Greutate: g 595
Frontal IP degree: IP20
Type of contact: CO
Tightening torque for terminals max: Nm 0.25
Conductor section max (IEC): mm² 1.5
Pret: 2 202,49 lei (TVA inclus)

Detalii online: <https://www.materialeelectric.ro/descarcator-tip-1-si-2-modnobloc-iec-impulse-current-iimp-10-350ms-25ka-per-pole-3p-cu-contact-comanda-de-la-distanta-126740>