


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

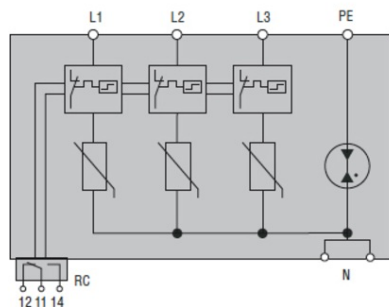

**LOVATO DESCARCATOR TIP 1 SI 2 MODNOBLOC, IEC IMPULSE
CURRENT IIMP (10/350ÎCS) 12.5KA PER POLE, 3P+N. CU CONTACT
COMANDA DE LA DISTANTA**

Cod producator Lovato: Surge Protection Device (SPD)

Tip produs: SA0B

Operating voltage type: AC

Application: AC Power lines

Numar de poli: 3P+N

Number of DIN modules: 4

Relay output: Da

SPD according to IEC/EN 61643-11: Da

Rated operational voltage AC (IEC): VAC 230 / 400

Maximum continuous voltage (IEC) Uc: V 320

Impulse current (IEC) Iimp 10/350 (L-N/N-PE): kA 12.5 / 50

Maximum discharge current (IEC) Imax 8/20 (L-N/N-PE): kA 50 /100

Rated discharge current (IEC) In 8/20 (L-N/N-PE): kA 20 / 50

Voltage protection level (IEC) Up (L-N/N-PE):

Temporary overvoltage (TOV) resistance Ut (L-N for 5s): V 335

Follow current (IEC) If (N-PE) rms: A >100

Tripping time ta (L-N/N-PE): ns

Thermal isolation protection: Da

Backup protection fuse (IEC) with supply line fuse >250A (L-N/N-PE): 250A gG

Maximum short circuit current (IEC) at 50Hz: kA 50

Status indicator - operating / end of life: Frontal indication/Aux contact

Max altitude: m 2000

Mounting: Din rail

Tightening torque for terminals max: Nm 3

Conductor section - Flexible max (IEC): mm² 25

Conductor section - Rigid max (IEC): mm² 35

Greutate: g 600

Frontal IP degree: IP20

Type of contact: CO

Tightening torque for terminals max: Nm 0.25

Conductor section max (IEC): mm² 1.5

Pret: 2 670,88 lei (TVA inclus)

Detalii online: <https://www.materialeelectric.ro/descarcator-tip-1-si-2-modnobloc-iec-impulse-current-iimp-10-350ms-12-5ka-per-pole-3p-n-cu-contact-comanda-de-la-distanta-126752>