


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

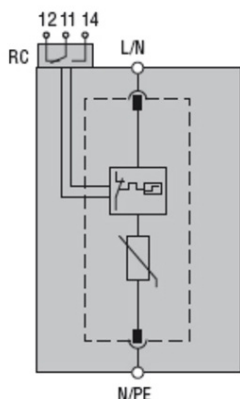

**LOVATO DESCARCATOR TIP 2 CU CARTUS, RATED DISCHARGE
CURRENT IN (8/20MS) 20KA PER POLE, 1P. CU CONTACT COMANDA
DE LA DISTANTA**

Cod producator Lovato: Surge Protection Device (SPD)

Tip produs: SG2

Operating voltage type: AC

Application: AC Power lines

Numar de poli: 1P

Number of DIN modules: 1

Relay output: Da

SPD according to IEC/EN 61643-11: Da

Rated operational voltage AC (IEC): VAC 230

Maximum continuous voltage (IEC) U_c : V 300

Maximum discharge current (IEC) I_{max} 8/20 (L-N/N-PE): kA 50

Rated discharge current (IEC) I_n 8/20 (L-N/N-PE): kA 20

Voltage protection level (IEC) U_p (L-N/N-PE):

Temporary overvoltage (TOV) resistance U_t (L-N for 5s): V 337

Follow current (IEC) I_f (N-PE) rms: A No

Tripping time t_a (L-N/N-PE): ns

Thermal isolation protection: Da

Backup protection fuse (IEC) with supply fuse $>315A$ (L-N/N-PE): 315A / 250A Gg

Maximum short circuit current (IEC) at 50Hz: kA 25 / 50

Status indicator - operating / end of life: Frontal indication/Aux contact

Max altitude: m 2000

Mounting: Din rail

Tightening torque for terminals max: Nm 4.5

Conductor section - Flexible max (IEC): mm² 25

Conductor section - Rigid max (IEC): mm² 35

Greutate: g 135

Frontal IP degree: IP20

Type of contact: CO

Conductor section max (IEC): mm² 1.5

Pret: 220,94 lei (TVA inclus)

Detalii online: <https://www.materialeelectric.ro/descarcator-tip-2-cu-cartus-rated-discharge-current-in-8-20ms-20ka-per-pole-1p-cu-contact-comanda-de-la-distanta-126758>