


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

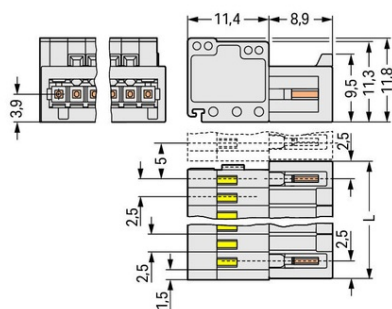

**WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED
AGAINST MISMATING; STRAIN RELIEF PLATE; 0.5 MM²; PIN
SPACING 2.5 MM; 8-POLE; 0,50 MM²; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 100; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 6; A
Legend (ratings): (III / 2) $\hat{=}$ ∞ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 150; V
Curent nominal UL (Use Group B): 4; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 150; V
Curent nominal CSA (Use Group B): 4; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0.08 ... 0.5 mm² / 28 ... 20 AWG;
Fine-stranded conductor: 0.08 ... 0.5 mm² / 28 ... 20 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 ... 0.34 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 0.34 mm²;
Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
Numar poli: 8;
Numar total de conexiuni: 8;
Total number of potentials: 8;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Conductor entry direction to mating direction: 0; °
Distanta intre pini: 2.5 mm / 0.098 inch;
Latime: 22.5 mm / 0.886 inch;
Inaltime: 11.8 mm / 0.465 inch;
Adancime: 20.3 mm / 0.799 inch;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for conductors;
Mismating protection: Yes;
Culoare: light gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,088; MJ
Greutate: 4,3; g
Temperatura lucru: -60 ... +100 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4044918849975;
Customs tariff number: 85366990990;
Pret: 31,17 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/1-conductor-male-connector-100-protected-against-mismating-strain-relief-plate-0-5-mm2-pin-spacing-2-5-mm-8-pole-0-50-mm2-light-gray-130597>