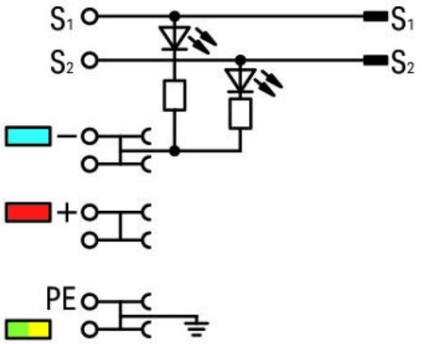


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<u>WAGO 4-CONDUCTOR SENSOR TERMINAL BLOCK; LED (YELLOW); FOR PNP-(HIGH-SIDE) SWITCHING SENSORS; WITH GROUND CONTACT; WITH PLUGGABLE SIGNAL LEVEL; 1 MMÂ²; PUSH-IN CAGE CLAMP®; 1,00 MMÂ²; GRAY</u> Voltage type 1: DC; Tensiune nominala: 24; V Curent nominal: 13,5; A Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group C): 300; V Curent nominal UL (Use Group C): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 15; A Certificari: UL 1059; Tensiune nominala CSA (Use Group C): 24; V Curent nominal CSA (Use Group C): 10; A Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Push-in; Open Tool Slot; Connectable conductor materials: Copper; Nominal cross-section: 1 mm²; Solid conductor: 0.14 ... 1.5 mm² / 24 ... 16 AWG; Solid conductor; push-in termination: 0.5 ... 1.5 mm² / 20 ... 16 AWG; Fine-stranded conductor: 0.14 ... 1.5 mm² / 24 ... 16 AWG; Fine-stranded conductor; with insulated ferrule: 0.5 ... 0.75 mm² / 20 ... 18 AWG; Fine-stranded conductor; with ferrule; push-in termination: 0.5 ... 0.75 mm² / 20 ... 18 AWG; Strip length: 9 ... 11 mm / 0.35 ... 0.43 inch; Numar total de conexiuni: 8; Total number of potentials: 5; Numar nivele: 1; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.; Latime: 7 mm / 0.276 inch; Inaltime from upper-edge of DIN-rail: 52.4 mm / 2.063 inch; Adancime: 97.3 mm / 3.831 inch; Design: horizontal; Tip montaj: DIN-35 rail; Marking level: Center/side marking; Culoare: gray; Material izolator: Polyamide 66 (PA 66); Greutate: 22,4; g Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143528634; Customs tariff number: 85369010000; Pret: 85,62 lei (TVA inclus) Detalii online: https://www.materialelectrice.ro/4-conductor-sensor-terminal-block-led-yellow-for-pnp-high-side-switching-sensors-with-ground-contact-with-pluggable-signal-level-1-mm2-push-in-cage-clamp-1-00-mm2-gray-130885
---	---