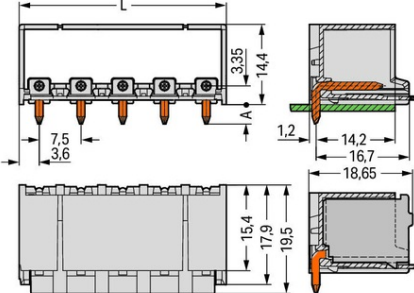


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Male Header. The top view shows a 5-pin header with a pitch of 7.5 mm and a pin diameter of 3.6 mm. The side view shows a height of 14.4 mm and a pin length of 3.35 mm. The cross-sectional view shows a pin diameter of 1.4 mm and a pin length of 1.2 mm. The bottom view shows a width of 15.4 mm and a pin spacing of 17.9 mm. The overall width is 19.5 mm.	<u>WAGO THT MALE HEADER; 1.4 MM Ã~ SOLDER PIN; ANGLED; PIN SPACING 7.5 MM; 5-POLE; LIGHT GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 16; A Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Numar poli: 5; Total number of potentials: 5; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7,5 mm / 0.295 inch; Latime: 37,2 mm / 1.465 inch; Inaltime: 18 mm / 0.709 inch; Inaltime de la fata: 14,4 mm / 0.567 inch; Adancime: 19,5 mm / 0.768 inch; Lungimea pinului de contact: 3,6; mm Diametrul pinului de contact: 1,4; mm Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 0; ° Locking of plug-in connection: Locking latch; PCB contact: THT; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,079; MJ Greutate: 3,8; g Temperatura lucru: -60 ... +100 °C; Product Group: 26 (picoMAX); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821164708; Customs tariff number: 85366990990; Pret: 7,58 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/tht-male-header-1-4-mm-oe-solder-pin-angled-pin-spacing-7-5-mm-5-pole-light-gray-132849
--	---