


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

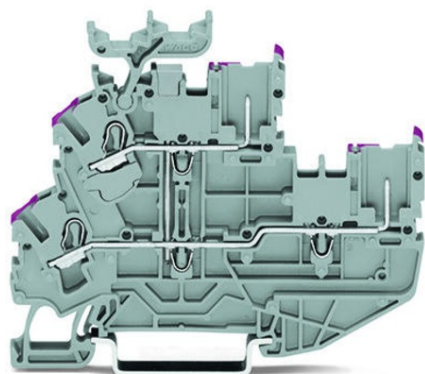

**WAGO 2-CONDUCTOR/2-PIN, DOUBLE-DECK CARRIER TERMINAL
BLOCK; 2-CONDUCTOR/2-PIN THROUGH TERMINAL BLOCK; L;
INTERNAL COMMONING; SUITABLE FOR EX NA APPLICATIONS;
CONDUCTOR ENTRY WITH VIOLET MARKING; FOR DIN-RAIL 35 X 15
AND 35 X 7.5; 2.5 MM²; PUSH-IN CAGE CLAMP®;**

Ratings per: IEC/EN 60947-7-1;
Tensiune nominala de supratensiune (III/2): 6; kV
Curent nominal: 20; A
Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;
Tensiune nominala EN (Ex e II): 630; V
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Open Tool Slot; Push-in;
Connectable conductor materials: Copper;
Nominal cross-section: 2.5 mm²;
Solid conductor: 0,25 ... 4 mm² / 22 ... 12 AWG;
Solid conductor; push-in termination: 0.75 ... 4 mm² / 18 ... 12 AWG;
Fine-stranded conductor: 0,25 ... 4 mm² / 22 ... 12 AWG;
Fine-stranded conductor; with insulated ferrule: 1 ... 2.5 mm² / 18 ... 12 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2.5 mm² / 18 ... 12 AWG;
Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;
Numar total de conexiuni: 2;
Total number of potentials: 1;
Numar nivele: 2;
Wiring type: Front-entry wiring;
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination.;
Latime: 5.2 mm / 0.205 inch;
Inaltime from upper-edge of DIN-rail: 51.3 mm / 2.02 inch;
Adancime: 80.1 mm / 3.154 inch;
Design: horizontal;
Tip montaj: DIN-35 rail;
Potential marking: L;
Marking level: Side marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Greutate: 12,1; g
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143299442;
Customs tariff number: 85366990990;
Pret: 15,94 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/2-conductor-2-pin-double-deck-carrier-terminal-block-2-conductor-2-pin-through-terminal-block-l-internal-commoning-suitable-for-ex-na-applications-conductor-entry-with-violet-marking-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-push-in-cage-clamp-2-50-mm2-gr>