


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

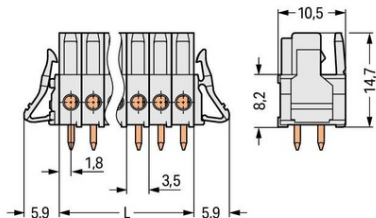

**WAGO THT FEMALE HEADER; 0.9 X 0.9 MM SOLDER PIN; STRAIGHT;
100% PROTECTED AGAINST MISMATING; LOCKING LEVER; PIN
SPACING 3.5 MM; 2-POLE; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 160; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 10; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Numar poli: 2;
Numar total de conexiuni: 2;
Total number of potentials: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 3.5 mm / 0.138 inch;
Latime: 18.8 mm / 0.74 inch;
Inaltime: 18.5 mm / 0.728 inch;
Inaltime de la fata: 14.7 mm / 0.579 inch;
Adancime: 10.5 mm / 0.413 inch;
Lungimea pinului de contact: 3,8; mm
Solder pin dimensions: 0.9 x 0.9 mm;
Diametrul de gaurire cu toleranta: 1.4 (+0.1) mm;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for PCBs;
Mismating protection: Yes;
Mating direction to the PCB: 90; °
Locking of plug-in connection: locking lever;
PCB contact: THT;
Solder pin arrangement: over the entire female connector, in line;
Number of solder pins per potential: 1;
Culoare: light gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Contact material: Copper alloy;
Contact plating: tin-plated;
Fire load: 0,028; MJ
Greutate: 1,5; g
Temperatura lucru: -60 ... +100 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4045454000059;
Customs tariff number: 85366990990;
Pret: 8,72 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-female-header-0-9-x-0-9-mm-solder-pin-straight-100-protected-against-mismating-locking-lever-pin-spacing-3-5-mm-2-pole-light-gray-133946>