


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

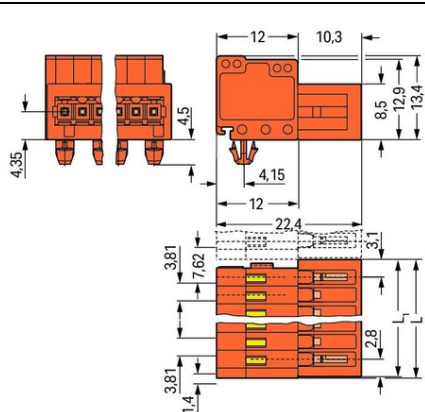

WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED AGAINST MISMATING; SNAP-IN MOUNTING FEET; 1.5 MM²; PIN SPACING 3.81 MM; 18-POLE; 1.50 MM²; ORANGE

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 160; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 10; A
 Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0.08 ... 1.5 mm² / 28 ... 14 AWG;
 Fine-stranded conductor: 0.08 ... 1.5 mm² / 28 ... 14 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm²;
 Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;
 Numar poli: 18;
 Numar total de conexiuni: 18;
 Total number of potentials: 18;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Note (conductor cross-section): Terminating 1.5 mm² conductors is possible; however insulation diameter does not allow clamping units to be terminated in a row.;;
 Conductor entry direction to mating direction: 0; °
 Distanta intre pini: 3.81 mm / 0.15 inch;
 Latime: 71.12 mm / 2.8 inch;
 Inaltime: 17.9 mm / 0.705 inch;
 Inaltime de la fata: 13.4 mm / 0.528 inch;
 Adancime: 22.3 mm / 0.878 inch;
 Housing sheet thickness: 0.6 ... 1.2 mm / 0.024 ... 0.047 inch;
 Tip montaj: Snap-in mounting foot;
 Tip montaj: Panel mounting;
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for conductors;
 Mismatching protection: Yes;
 Culoare: orange;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,322; MJ
 Greutate: 16; g
 Temperatura lucru: -60 ... +100 °C;
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4055143280983;
 Customs tariff number: 85366990990;
 Pret: 59,70 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismatching-snap-in-mounting-feet-1-5-mm2-pin-spacing-3-81-mm-18-pole-1-50-mm2-orange-133976>