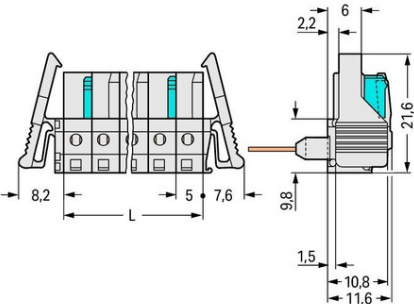


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	WAGO FEMALE CONNECTOR FOR RAIL-MOUNT TERMINAL BLOCKS; 0.6 X 1 MM PINS; ANGLED; 100% PROTECTED AGAINST MISMATING; LOCKING LEVER; PIN SPACING 5 MM; 8-POLE; LIGHT GRAY Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) $\hat{=}$ ∞™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 8; Total number of potentials: 8; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 55.8 mm / 2.197 inch; Inaltime: 26.1 mm / 1.028 inch; Inaltime de la fata: 11.6 mm / 0.457 inch; Adancime: 18.25 mm / 0.719 inch; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for front-entry wiring terminal block; Mismating protection: Yes; Locking of plug-in connection: locking lever; Mating direction to the rail-mount terminal block: 0; ° Culoare: light gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Greutate: 9,3; g Temperatura lucru: -60 ... +85 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143759625; Customs tariff number: 85366990990; Pret: 33,85 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/female-connector-for-rail-mount-terminal-blocks-0-6-x-1-mm-pins-angled-100-protected-against-mismating-locking-lever-pin-spacing-5-mm-8-pole-light-gray-134555
---	---