


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

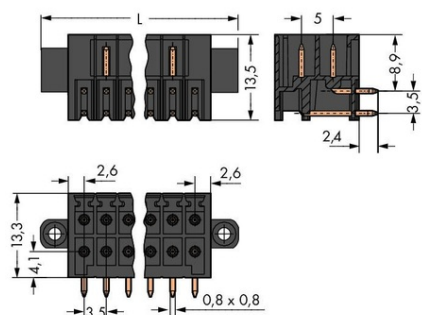

**WAGO THR MALE HEADER, 2-ROW; 0.8 X 0.8 MM SOLDER PIN;
ANGLED; 100% PROTECTED AGAINST MISMATING; THREADED
FLANGE; IN TAPE-AND-REEL PACKAGING; PIN SPACING 3.5 MM; 2 X
3-POLE; BLACK**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 80; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 250; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 10; A
 Legend (ratings): (III / 2) $\hat{=}$ ∞ ™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 150; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group C): 50; V
 Curent nominal UL (Use Group C): 10; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 150; V
 Curent nominal CSA (Use Group B): 12; A
 Numar poli: 6;
 Total number of potentials: 6;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 2;
 Distanta intre pini: 3.5 mm / 0.138 inch;
 Latime: 20.6 mm / 0.811 inch;
 Inaltime: 15.7 mm / 0.618 inch;
 Inaltime de la fata: 13.3 mm / 0.524 inch;
 Adancime: 13.5 mm / 0.531 inch;
 Lungimea pinului de contact: 2,4; mm
 Solder pin dimensions: 0.8 x 0.8 mm;
 Diametru placat prin gaura (THR): 1.3 (+0.1) mm;
 Reel diameter of tape-and-reel packaging: 330; mm
 Tape Latime: 32; mm
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for PCBs;
 Mismatching protection: Yes;
 Mating direction to the PCB: 0; °
 Locking of plug-in connection: Threaded flange;
 PCB contact: THR;
 Solder pin arrangement: over the entire male connector, in line;
 Number of solder pins per potential: 1;
 Culoare: black;
 Material group: I;
 Material izolator: Polyphthalamide (PPA GF);
 Flammability class per UL94: V0;
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Greutate: 2,6; g
 Temperatura lucru: -60 ... +100 °C;
 Tip ambalare: bag;
 Tara de origine: DE;
 GTIN: 4055143778831;
 Customs tariff number: 85366990990;
 Pret: 16,66 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-male-header-2-row-0-8-x-0-8-mm-solder-pin-angled-100-protected-against-mismatching-threaded-flange-in-tape-and-reel-packaging-pin-spacing-3-5-mm-2-x-3-pole-black-134936>