


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

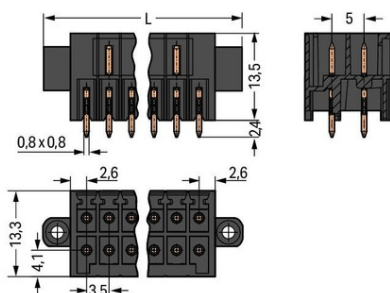

**WAGO THR MALE HEADER, 2-ROW; 0.8 X 0.8 MM SOLDER PIN;
STRAIGHT; 100% PROTECTED AGAINST MISMATING; THREADED
FLANGE; IN TAPE-AND-REEL PACKAGING; PIN SPACING 3.5 MM; 2 X
3-POLE; BLACK**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 80; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 250; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 10; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 150; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group C): 50; V
Curent nominal UL (Use Group C): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 150; V
Curent nominal CSA (Use Group B): 12; A
Numar poli: 6;
Total number of potentials: 6;
Numar tipuri de conexiuni: 1;
Numar nivele: 2;
Distanta intre pini: 3.5 mm / 0.138 inch;
Latime: 20.6 mm / 0.811 inch;
Inaltime: 15.9 mm / 0.626 inch;
Inaltime de la fata: 13.5 mm / 0.531 inch;
Adancime: 13.3 mm / 0.524 inch;
Lungimea pinului de contact: 2,4; mm
Solder pin dimensions: 0.8 x 0.8 mm;
Diametru placat prin gaura (THR): 1.3 (+0.1) mm;
Reel diameter of tape-and-reel packaging: 330; mm
Tape Latime: 32; mm
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for PCBs;
Mismating protection: Yes;
Mating direction to the PCB: 90; °
Locking of plug-in connection: Threaded flange;
PCB contact: THR;
Solder pin arrangement: over the entire male connector, in line;
Number of solder pins per potential: 1;
Culoare: black;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Greutate: 2,4; g
Temperatura lucru: -60 ... +100 °C;
Tip ambalare: bag;
Tara de origine: DE;
GTIN: 4055143778237;
Customs tariff number: 85366990990;
Pret: 17,07 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-male-header-2-row-0-8-x-0-8-mm-solder-pin-straight-100-protected-against-mismating-threaded-flange-in-tape-and-reel-packaging-pin-spacing-3-5-mm-2-x-3-pole-black-135045>