


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

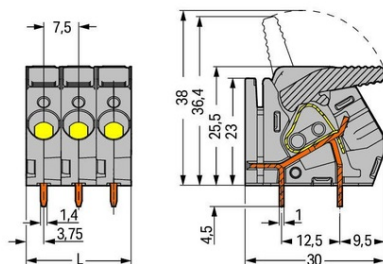

WAGO PCB TERMINAL BLOCK; LEVER; 6 MMÂ²; PIN SPACING 7.5 MM; 5-POLE; CAGE CLAMPÂ®; COMMONING OPTION; 6,00 MMÂ²; GREEN-YELLOW

Ratings per: IEC/EN 60664-1;
Ratings (note): Using adjacent jumpers, the Tensiune nominala is reduced to 400 V with 7.5 mm Distanta intre pini in Category III/3.;
Tesiune nominala (III/3): 500; V
Tensiune nominala de supratensiune (III/3): 6; kV
Tensiune nominala (III/2): 630; V
Tensiune nominala de supratensiune (III/2): 6; kV
Tesiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 6; kV
Curent nominal: 41; A
Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 30; A
Tensiune nominala UL (Use Group C): 150; V
Curent nominal UL (Use Group C): 30; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 30; A
Certificari: UL 1059;
Solid conductor: 0,5 ... 6 mm² / 20 ... 10 AWG;
Fine-stranded conductor: 0,5 ... 6 mm² / 20 ... 10 AWG;
Fine-stranded conductor; with insulated ferrule: 0,5 ... 6 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 6 mm²;
Conductor connection direction to PCB: 30; °
Numar poli: 5;
Distanta intre pini: 7,5 mm / 0.295 inch;
Latime: 37,5 mm / 1.476 inch;
Inaltime de la fata: 25,5 mm / 1.004 inch;
Solder pin dimensions: 1 x 1,4 mm;
Diametrul de gaurire cu toleranta: 1,8 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (in-line);
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ECu);
Tip ambalare: BOX;
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-lever-6-mm2-pin-spacing-7-5-mm-5-pole-cage-clamp-commoning-option-6-00-mm2-green-yellow-135697>