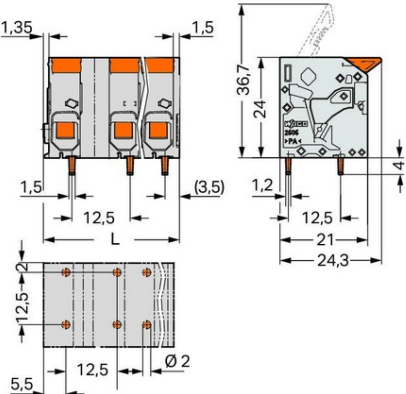


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<u>WAGO PCB TERMINAL BLOCK; LEVER; 6 MM²; PIN SPACING 12.5 MM; 4-POLE; PUSH-IN CAGE CLAMP®; 6,00 MM²; GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 800; V Tensiune nominala de supratensiune (III/3): 8; kV Tensiune nominala (III/2): 1000; V Tensiune nominala de supratensiune (III/2): 8; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 8; kV Curent nominal: 41; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 600; V Curent nominal UL (Use Group B): 42; A Tensiune nominala UL (Use Group C): 600; V Curent nominal UL (Use Group C): 42; A Certificari: UL 1059; Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Lever; Solid conductor: 0,2 ... 10 mm² / 24 ... 8 AWG; Fine-stranded conductor: 0,2 ... 10 mm² / 24 ... 8 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 6 mm²; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 6 mm²; Fine-stranded conductor; with twin ferrule: 0,25 ... 2,5 mm²; Strip length: 11 ... 13 mm / 0.43 ... 0.51 inch; Conductor connection direction to PCB: 0; ° Numar poli: 4; Numar total de conexiuni: 4; Total number of potentials: 4; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 12,5 mm / 0.492 inch; Latime: 46,5 mm / 1.831 inch; Inaltime: 28 mm / 1.102 inch; Inaltime de la fata: 24 mm / 0.945 inch; Lungimea pinului de contact: 4; mm Solder pin dimensions: 1,5 x 1,2 mm; Diametrul de gaurire cu toleranta: 2 (+0,1) mm; PCB contact: THT; Solder pin arrangement: over the entire terminal strip (in-line); Number of solder pins per potential: 2; Culoare: gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Color of actuator: orange; Greutate: 20,7; g Temperatura lucru: -60 ... +105 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143862110; Customs tariff number: 85369010000; Pret: 37,32 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/pcb-terminal-block-lever-6-mm2-pin-spacing-12-5-mm-4-pole-push-in-cage-clamp-6-00-mm2-gray-136202
---	--