


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

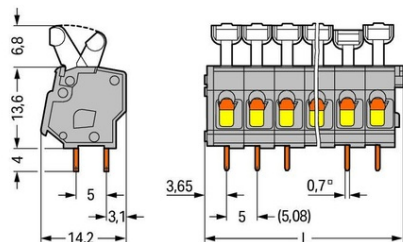

**WAGO PCB TERMINAL BLOCK; PUSH-BUTTON; 2.5 MM²; PIN
SPACING 5/5.08 MM; 16-POLE; SUITABLE FOR EX-E APPLICATIONS;
CAGE CLAMP®; COMMONING OPTION; 2,50 MM²; LIGHT GRAY**

Ratings per: ATEX: PTB 06 ATEX 1061 U / IECEx: PTB 06.0042 U;
Legend (ratings): (III / 2) %TM Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 15; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 15; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tensiune nominala EN (Ex e II): 176; V
Curent nominal (Ex e II): 16; A
Note (conductor cross-section): 12 AWG: THHN, THWN;
Diametrul de gaurire cu toleranta: 1.1 (+0.1) mm;
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ECu);
Greutate: 18,2; g
Tip ambalare: BOX;
GTIN: 4044918678827;
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-push-button-2-5-mm2-pin-spacing-5-5-08-mm-16-pole-suitable-for-ex-e-applications-cage-clamp-commoning-option-2-50-mm2-light-gray-136433>