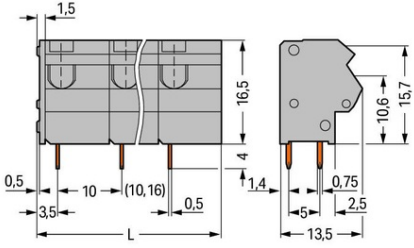


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO PCB Terminal Block showing top and side views with dimensions. The top view shows a rectangular block with 9 potential positions, each with a width of 1.5 mm and a pitch of 10 mm. The side view shows a height of 16.5 mm, a width of 13.5 mm, and a depth of 1.4 mm. The terminal strip has a width of 0.5 mm and a height of 0.75 mm. The distance between the terminal strip and the PCB contact is 1.4 mm. The distance between the terminal strip and the PCB contact is 1.4 mm. The distance between the terminal strip and the PCB contact is 1.4 mm.	<u>WAGO PCB TERMINAL BLOCK; 2.5 MM²; PIN SPACING 10/10.16 MM; 9-POLE; PUSH WIRE[®]; 2,50 MM²; GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 630; V Tensiune nominala de supratensiune (III/3): 8; kV Tensiune nominala (III/2): 1000; V Tensiune nominala de supratensiune (III/2): 8; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 8; kV Curent nominal: 24; A Legend (ratings): (III / 2) %TM Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 10; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Tehnologie conexiune: PUSH WIRE[®]; Tip actionare: Operating tool; Solid conductor: 0.5 ... 2.5 mm² / 20 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 0.5 ... 1.5 mm²; Fine-stranded conductor; with uninsulated ferrule: 0.5 ... 1.5 mm²; Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch; Conductor connection direction to PCB: 45; ° Numar poli: 9; Numar total de conexiuni: 9; Total number of potentials: 9; Numar tipuri de conexiuni: 1; Numar nivele: 1; Note (conductor cross-section): 12 AWG: THHN, THWN; Distanta intre pini: 10/10.16 mm / 0.394/0.4 inch; Latime: 91.5 mm / 3.602 inch; Inaltime: 19.7 mm / 0.776 inch; Inaltime de la fata: 15.7 mm / 0.618 inch; Adancime: 13.5 mm / 0.531 inch; Lungimea pinului de contact: 4; mm Solder pin dimensions: 0.5 x 0.75 mm; Diametrul de gaurire cu toleranta: 1.1 (+0.1) mm; PCB contact: THT; Solder pin arrangement: over the entire terminal strip, in line; Number of solder pins per potential: 2; Culoare: gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic (ECu); Contact plating: tin-plated; Greutate: 13,9; g Temperatura lucru: -60 ... +105 °C; Product Group: 4 (Printed Circuit); Tip ambalare: BOX; Tara de origine: PL; GTIN: 4017332227940; Customs tariff number: 85369010000; Pret: 14,93 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/pcb-terminal-block-2-5-mm2-pin-spacing-10-10-16-mm-9-pole-push-wire-2-50-mm2-gray-136876
---	---