


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

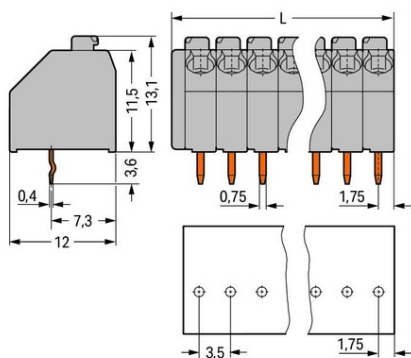

**WAGO PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM²; PIN
SPACING 3.5 MM; 12-POLE; PUSH-IN CAGE CLAMP®; 1,50 MM²;
ORANGE**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 160; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 8; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 5; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 5; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-button;
Solid conductor: 0.2 ... 1.5 mm² / 24 ... 16 AWG;
Fine-stranded conductor: 0.2 ... 1.5 mm² / 24 ... 16 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 ... 1 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1 mm²;
Strip length: 8.5 ... 9.5 mm / 0.33 ... 0.37 inch;
Conductor connection direction to PCB: 45; °
Numar poli: 12;
Numar total de conexiuni: 12;
Total number of potentials: 12;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 3.5 mm / 0.138 inch;
Latime: 43.5 mm / 1.713 inch;
Inaltime: 16.7 mm / 0.657 inch;
Inaltime de la fata: 13.1 mm / 0.516 inch;
Adancime: 12 mm / 0.472 inch;
Lungimea pinului de contact: 3,6; mm
Solder pin dimensions: 0.4 x 0.75 mm;
Diametrul de gaurire cu toleranta: 1 (+0.1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip, in line;
Number of solder pins per potential: 1;
Culoare: orange;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,114; MJ
Greutate: 5,6; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4044918647823;
Customs tariff number: 85369010000;
Pret: 13,14 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-push-button-1-5-mm2-pin-spacing-3-5-mm-12-pole-push-in-cage-clamp-1-50-mm2-orange-137165>