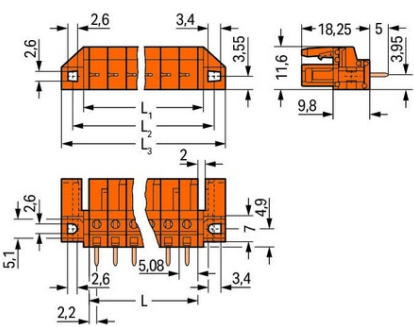


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Female Header showing three views: top, side, and front. Dimensions are provided in millimeters (mm) and inches (inch). Key dimensions include: top view (2.6 mm, 3.4 mm, 3.55 mm, 11.6 mm, 18.25 mm, 5 mm, 9.8 mm, 2.2 mm, 5.08 mm, 2.6 mm, 3.4 mm, 5.1 mm); side view (2.6 mm, 3.4 mm, 3.55 mm, 11.6 mm, 18.25 mm, 5 mm, 9.8 mm, 2.2 mm, 5.08 mm, 2.6 mm, 3.4 mm, 5.1 mm); front view (2.6 mm, 3.4 mm, 3.55 mm, 11.6 mm, 18.25 mm, 5 mm, 9.8 mm, 2.2 mm, 5.08 mm, 2.6 mm, 3.4 mm, 5.1 mm).	WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; STRAIGHT; SPACER FLANGE; PIN SPACING 5.08 MM; 3-POLE; ORANGE Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 3; Numar total de conexiuni: 3; Total number of potentials: 3; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5.08 mm / 0.2 inch; Latime: 30.04 mm / 1.183 inch; Inaltime: 23.25 mm / 0.915 inch; Inaltime de la fata: 18.25 mm / 0.719 inch; Adancime: 11.6 mm / 0.457 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,073; MJ Greutate: 3,6; g Temperatura lucru: -60 ... +85 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4044918623810; Customs tariff number: 85366990990; Pret: 10,33 lei (TVA inclus) Detalii online: https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-spacer-flange-pin-spacing-5-08-mm-3-pole-orange-138228
---	--