


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

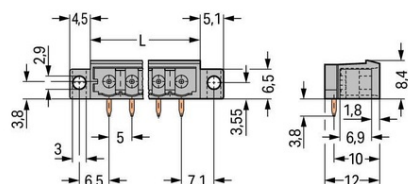

**WAGO THT MALE HEADER: 1.2 X 1.2 MM SOLDER PIN; ANGLED;
CLAMPING COLLAR: PIN SPACING 5 MM; 6-POLE; GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 250; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Tensiune nominala (III/2): 320; V
 Tensiune nominala de supratensiune (III/2): 4; kV
 Tensiune nominala (II/2): 630; V
 Tensiune nominala de supratensiune (II/2): 4; kV
 Curent nominal: 16; A
 Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 15; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala UL 1977: 600; V
 Curent nominal UL 1977: 15; A
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 15; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Numar poli: 6;
 Total number of potentials: 6;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 5 mm / 0.197 inch;
 Latime: 42.8 mm / 1.685 inch;
 Inaltime: 12.2 mm / 0.48 inch;
 Inaltime de la fata: 8.4 mm / 0.331 inch;
 Adancime: 12 mm / 0.472 inch;
 Lungimea pinului de contact: 3,8; mm
 Solder pin dimensions: 1.2 x 1.2 mm;
 Diametrul de gaurire cu toleranta: 1.7 (+0.1) mm;
 Tip montaj: Mounting flange;
 Tip montaj: Feed-through mounting; Panel mounting;
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for PCBs;
 Mismatching protection: No;
 Mating direction to the PCB: 0; °
 PCB contact: THT;
 Solder pin arrangement: over the entire male connector, in line;
 Number of solder pins per potential: 1;
 Culoare: gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Fire load: 0,046; MJ
 Greutate: 2,7; g
 Temperatura lucru: -60 ... +100 °C;
 Product Group: 3 (Multi Conn. System);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4044918930444;
 Customs tariff number: 85366990990;
 Pret: 10,33 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/tht-male-header-1-2-x-1-2-mm-solder-pin-angled-clamping-collar-pin-spacing-5-mm-6-pole-gray-138644>