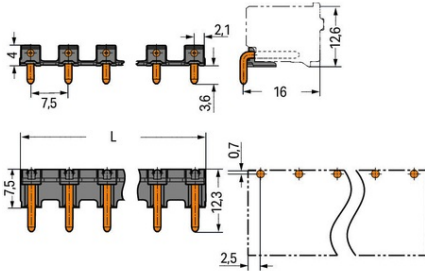


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<u>WAGO SOLDER PIN STRIP; 1.4 MM Ã SOLDER PIN; ANGLED; PIN SPACING 7.5 MM; 5-POLE; BLACK</u> Ratings per: IEC/EN 60664-1; Tesiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tesiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 16; A Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Numar poli: 5; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7.5 mm / 0.295 inch; Latime: 40.7 mm / 1.602 inch; Inaltime: 7.6 mm / 0.299 inch; Inaltime de la fata: 4 mm / 0.157 inch; Adancime: 12.3 mm / 0.484 inch; Lungimea pinului de contact: 3,6; mm Diametrul pinului de contact: 1,4; mm Diametrul de gaurire cu toleranta: 1.6 (+0.1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Culoare: black; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Greutate: 1,4; g Temperatura lucru: -60 ... +100 °C; Tip ambalare: bag; Tara de origine: CN; GTIN: 4055143935784; Customs tariff number: 85369010000; Pret: 5,97 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/solder-pin-strip-1-4-mm-oe-solder-pin-angled-pin-spacing-7-5-mm-5-pole-black-139617
--	---