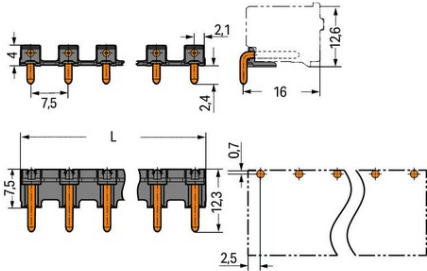


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO solder pin strip. The top view shows a 4-pole configuration with a pitch of 7.5 mm and a total width of 33.2 mm. The side view shows a height of 6.4 mm and a pin length of 12.3 mm. A detail view shows the angled pin with a 0.7 mm diameter and a 2.5 mm length.	<u>WAGO SOLDER PIN STRIP; 1.4 MM ~ SOLDER PIN; ANGLED; PIN SPACING 7.5 MM; 4-POLE; BLACK</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 16; A Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Numar poli: 4; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7.5 mm / 0.295 inch; Latime: 33.2 mm / 1.307 inch; Inaltime: 6.4 mm / 0.252 inch; Inaltime de la fata: 4 mm / 0.157 inch; Adancime: 12.3 mm / 0.484 inch; Lungimea pinului de contact: 2,4; mm Diametrul pinului de contact: 1,4; mm Diametru placat prin gaura (THR): 1.6 (+0.1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THR; Culoare: black; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Cupru electrolitic (ECu); Contact plating: tin-plated; Greutate: 1,1; g Temperatura lucru: -60 ... +100 °C; Tip ambalare: bag; Tara de origine: CN; GTIN: 4055143935005; Customs tariff number: 85369010000; Pret: 4,84 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/solder-pin-strip-1-4-mm-oe-solder-pin-angled-pin-spacing-7-5-mm-4-pole-black-139619
---	--