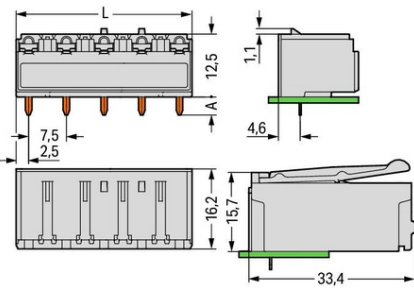


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Female Header. The drawing includes three views: a top view showing the header with four pins, a side view showing the profile, and a front view showing the internal structure. Dimensions are provided in millimeters: top view (L, 12.5, 7.5, 2.5), side view (1.1, 4.6, 16.2, 15.7, 33.4), and front view (16.2, 15.7, 33.4).	<u>WAGO THT FEMALE HEADER; 0.4 X 1.3 MM SOLDER PIN; ANGLED; PIN SPACING 7.5 MM; 4-POLE; LIGHT GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 16; A Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Numar poli: 4; Total number of potentials: 4; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7,5 mm / 0.295 inch; Latime: 27,5 mm / 1.083 inch; Inaltime: 16 mm / 0.63 inch; Inaltime de la fata: 13,6 mm / 0.535 inch; Adancime: 15,4 mm / 0.606 inch; Lungimea pinului de contact: 2,4; mm Solder pin dimensions: 0,4 x 1,3 mm; Diametru placat prin gaura (THR): 1,5 (+0,1) mm; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THR; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,123; MJ Greutate: 4,9; g Temperatura lucru: -60 ... +100 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821396451; Customs tariff number: 85366990990; Pret: 15,77 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/tht-female-header-0-4-x-1-3-mm-solder-pin-angled-pin-spacing-7-5-mm-4-pole-light-gray-139708
--	---