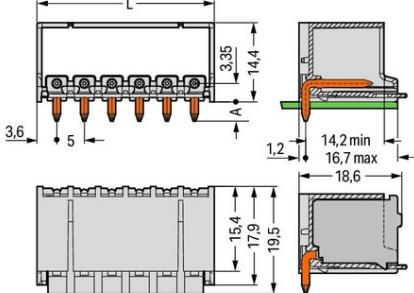


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THR Male Header. The top view shows a row of pins with a pitch of 5 mm and a total length L. The side view shows the height of the header with dimensions 3.35, 14.4, and 1.2. The cross-sectional view shows the internal structure with dimensions 14.2 min, 16.7 max, and 18.6. The bottom view shows the width of the header with dimensions 15.4, 17.9, and 19.5.	<u>WAGO THR MALE HEADER; 1.4 MM ~ SOLDER PIN; ANGLED; PIN SPACING 5 MM; 2-POLE; LIGHT GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 250; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 16; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Numar poli: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 12,2 mm / 0.48 inch; Inaltime: 16,8 mm / 0.661 inch; Inaltime de la fata: 14,4 mm / 0.567 inch; Adancime: 19,5 mm / 0.768 inch; Lungimea pinului de contact: 2,4; mm Diametrul pinului de contact: 1,4; mm Diametru placat prin gaura (THR): 1,6 (+0,1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 0; ° Locking of plug-in connection: Locking latch; PCB contact: THR; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,036; MJ Greutate: 1,6; g Temperatura lucru: -60 ... +100 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821395737; Customs tariff number: 85366990990; Pret: 2,57 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/thr-male-header-1-4-mm-oe-solder-pin-angled-pin-spacing-5-mm-2-pole-light-gray-139841
---	--