


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

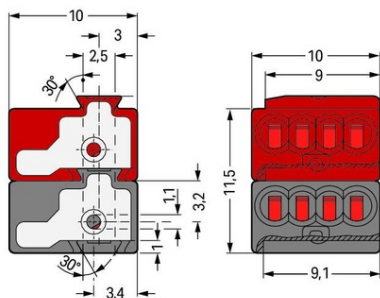

**WAGO 4-CONDUCTOR MODULAR PCB CONNECTOR; FOR
INDIVIDUAL SOLDER PINS; FOR KNX; 0.8 MM $\bar{A}$; PIN SPACING 5.75
MM; 2-POLE; LIGHT GRAY/YELLOW**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 100; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Current nominal: 6; A
Legend (ratings): (III / 2) $\hat{A}\%$ ™ Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tehnologie conexiune: PUSH WIRE®;
Conductor diameter: 0,6 ... 0,8 mm;
Conductor diameter (note): When using different conductor diameters;
Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
Numar poli: 2;
Conductor diameter 2: 1 mm;
Conductor diameter (note) 2: When using identical conductor diameters;
Numar total de conexiuni: 8;
Total number of potentials: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Latime: 10 mm / 0.394 inch;
Inaltime: 11,5 mm / 0.453 inch;
Adancime: 10 mm / 0.394 inch;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for conductor;
Culoare: light gray/yellow;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,022; MJ
Greutate: 1,5; g
Temperatura lucru: -60 ... +105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918441407;
Customs tariff number: 85369010000;
Pret: 2,81 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/4-conductor-modular-pcb-connector-for-individual-solder-pins-for-knx-0-8-mm-oe-pin-spacing-5-75-mm-2-pole-light-gray-yellow-140385>