


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

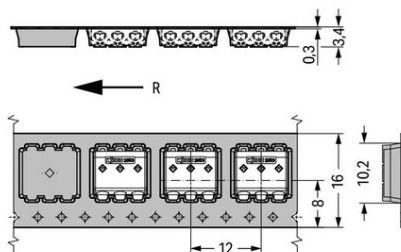

**WAGO SMD PCB TERMINAL BLOCK; 0.5 MM²; PIN SPACING 3 MM;
3-POLE; PUSH WIRE[®]; IN TAPE-AND-REEL PACKAGING; 0,50
MM²; WHITE**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 63; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 3; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Tensiune nominala UL 1977: 250; V
Curent nominal UL 1977: 3; A
Tehnologie conexiune: PUSH WIRE[®];
Tip actionare: Operating tool;
Solid conductor: 0,14 ... 0,34 mm² / 26 ... 22 AWG;
Strip length: 4 ... 5,5 mm / 0.16 ... 0.22 inch;
Conductor connection direction to PCB: 0; °
Numar poli: 3;
Solid conductor 2: 0,5 mm² / 20 AWG;
Note (conductor cross-section) 2: No reconnection of smaller conductor cross-sections (0.5 mm²/20 AWG);
Strip length 2: 6 ... 7,5 mm / 0.24 ... 0.3 inch;
Numar total de conexiuni: 3;
Total number of potentials: 3;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Note (conductor cross-section): For conductors (26 AWG) that are not rigid enough, the clamping unit must be opened using an operating tool.;
Distanta intre pini: 3 mm / 0.118 inch;
Latime: 8,9 mm / 0.35 inch;
Inaltime: 2,7 mm / 0.106 inch;
Adancime: 7,9 mm / 0.311 inch;
Reel diameter of tape-and-reel packaging: 330; mm
Tape Latime: 16; mm
PCB contact: SMD;
Culoare: white;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Copper alloy;
Contact plating: tin-plated;
Greutate: 0,2; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 33 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: CH;
GTIN: 4055143082693;
Customs tariff number: 85369010000;
Pret: 4,18 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/smd-pcb-terminal-block-0-5-mm2-pin-spacing-3-mm-3-pole-push-wire-in-tape-and-reel-packaging-0-50-mm2-white-140579>