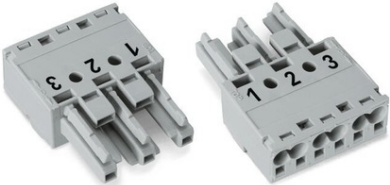


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	WAGO SOCKET; 3-POLE; COD. B; 4,00 MM²; GRAY Note on Contact Resistance: approx. 1 mΩ; of contact resistance © approx. 0.25 mΩ; contact transition plug/socket; Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 250; V Tensiune nominala de supratensiune (III/3): 4; kV Curent nominal: 25; A Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 23; A Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Operating tool; Push-in; Nominal cross-section: 4 mm²; Solid conductor: 0,5 ... 4 mm² / 20 ... 12 AWG; Solid conductor; push-in termination: 1,5 ... 4 mm² / 16 ... 12 AWG; Stranded conductor: 0,5 ... 2,5 mm² / 20 ... 14 AWG; Fine-stranded conductor: 0,5 ... 4 mm² / 20 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm² / 20 ... 16 AWG; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm² / 20 ... 14 AWG; Fine-stranded conductor; with ferrule; push-in termination: 1,5 mm² / 16 AWG; Strip length: 9 mm / 0.35 inch; Note (strip length): see also packaging or instructions; Numar poli: 3; Numar total de conexiuni: 6; Total number of potentials: 3; Conductor entry direction to mating direction: 0; ° Distanta intre pini: 10 mm / 0.394 inch; Latime: 30 mm / 1.181 inch; Inaltime: 12,9 mm / 0.508 inch; Adancime: 37,5 mm / 1.476 inch; Coding: B; Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number); Retention force of a plug-in connection: Locked: > 80 N; Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number); Number of mating cycles: >200, without resistive load 100, with resistive load IN = 25 A, tested (4 mm²/AWG 12); Marking: 1 2 3; Protection type: IP20; Note on protection type: In mated condition with strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas.); Potential marking: 1 2 3; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for conductor; Mismating protection: Yes; Locking of plug-in connection: locking lever; Locking lever: retrofittable; Culoare: gray; Material izolator: Polyamide 66 (PA 66); Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper or copper alloy (surface-treated); Fire load: 0,162; MJ Greutate: 9,6; g Processing temperature: -5 ... +40 °C; Continuous operating temperature: -35 ... +85 °C; Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C; Product Group: 20 (WINSTA); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4044918252430; Customs tariff number: 85366990990; Pret: 14,03 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/socket-3-pole-cod-b-4-00-mm2-gray-140623
---	---