


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

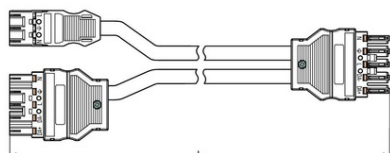

**WAGO PRE-ASSEMBLED Y-CABLE; ECA; 2 X PLUG/SOCKET; 3-POLE +
5-POLE/5-POLE; H05Z1Z1-F 3G 2.5 MM²; H05Z1Z1-F 2 X 1,50 MM²;
0.5 M; 2,50 MM²**

Note on Contact Resistance: approx. 1 mΩ; of contact resistanceâ€© approx. 0.25 mΩ;,
contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tesiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;
Tensiune nominala UL 1977: 600; V
Curent nominal UL 1977: 23; A
Numar poli: 3;
Pole number 2: 5;
Pole number 3: 5;
Total number of potentials: 5;
Conductor preparation: tip-bonded;
Sheathed cable diameter: 6,8 ... 8,6 mm;
Sectiunea transversala a firului: 1,5; mm²
Sectiunea transversala a firului (2): 2,5; mm²
Connection type: MIDI plug; MIDI plug - MIDI socket;
Durchmesser der Mantelleitung 2: 9,2 ... 11,4 mm;
Distanta intre pini: 10 mm / 0.394 inch;
Total length: 0,5; m
Technologie: DALI;
Coding: A;
Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number);
Retention force of a plug-in connection: when locked: > 80N;
Unmating force of a plug-in connection: when unlocked: approx. 20 ... 70 N (depending
on pole number);
Number of mating cycles: 200 (without resistive load) 100 (with resistive load IN = 25
A), tested (4 mm²);
Connection type: MIDI plug; MIDI plug - MIDI socket;
Type of pre-assembled cable: Y-cable;
Cable type: H05Z1Z1-F 2x1.5;
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed
for use in open, easily accessible areas).;
Application: General mains applications;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: retrofittable;
Material izolator: Polyamide 66 (PA 66);
Fire class per EN 50575: Eca;
Contact material: Copper or copper alloy (surface-treated);
Fire load: 15,424; MJ
Halogen-free: Yes;
Greutate: 178,3; g
Processing temperature: -5 ... +40 °C;
Continuous operating temperature: -35 ... +85 °C;
Note on continuous operating temperature: PVC cable for temperatures ≤ 70 °C
(including halogen-free) Insulating parts for temperatures ≤ 105 °C;
Tip ambalare: not packed;
Tara de origine: DE;
GTIN: 4055143848442;
Customs tariff number: 85444290900;
Pret: 155,68 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pre-assembled-y-cable-eca-2-x-plug-socket-3-pole-5-pole-5-pole-h05z1z1-f-3g-2-5-mm2-h05z1z1-f-2-x-1-50-mm2-0-5-m-2-50-mm2-141481>