


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

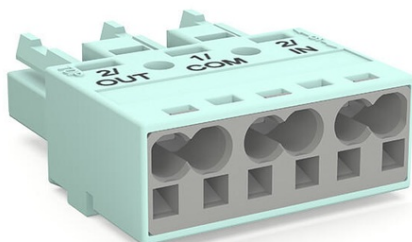

WAGO SOCKET; 3-POLE; COD. B; 4,00 MM²; LIGHT TURQUOISE

Note on Contact Resistance: approx. 1 mΩ; of contact resistance ≈ approx. 0.25 mΩ;
 contact transition plug/socket;
 Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 250; V
 Tensiune nominala de supratensiune (III/3): 4; kV
 Current nominal: 25; A
 Legend (ratings): (III / 3) °™ Overvoltage category III / Pollution degree 3;
 Tensiune nominala UL 1977: 600; V
 Current nominal UL 1977: 23; A
 Nominal cross-section: 4 mm²;
 Solid conductor: 0,5 ... 4 mm² / 20 ... 12 AWG;
 Solid conductor; push-in termination: 1,5 ... 4 mm² / 16 ... 12 AWG;
 Stranded conductor: 0,5 ... 2,5 mm² / 20 ... 14 AWG;
 Fine-stranded conductor: 0,5 ... 4 mm² / 20 ... 12 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 1,5 mm² / 20 ... 16 AWG;
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 2,5 mm² / 20 ... 14 AWG;
 Fine-stranded conductor; with ferrule; push-in termination: 1,5 mm² / 16 AWG;
 Note (strip length): see also packaging or instructions;
 Numar poli: 3;
 Inaltime: 12,9 mm / 0.508 inch;
 Adancime: 37,5 mm / 1.476 inch;
 Retention force of a plug-in connection: Locked: > 80 N;
 Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number);
 Number of mating cycles: ≥200, without resistive load100, with resistive load IN = 25 A, tested (4 mm²/AWG 12);
 Protection type: IP20;
 Note on protection type: In mated condition with strain relief housing: IP2xC (These compact connectors are not designed for use in open, easily accessible areas.);
 Connector (connection type): for conductor;
 Mismating protection: Yes;
 Locking lever: retrofittable;
 Culoare: light turquoise;
 Material izolator: Polyamide 66 (PA 66);
 Contact material: Copper or copper alloy (surface-treated);
 Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;
 Tip ambalare: BOX;
 Customs tariff number: 85366990990;
 Pret: 16,54 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/socket-3-pole-cod-b-4-00-mm2-light-turquoise-141656>