


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

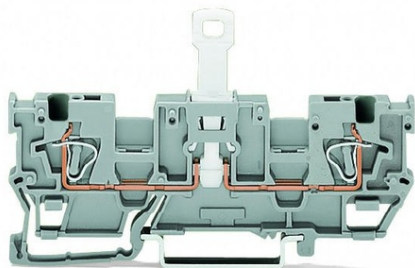

**WAGO 1-CONDUCTOR/1-CONDUCTOR DISCONNECT CARRIER  
TERMINAL BLOCK; WITH SHIELD CONTACT; WITH 2 JUMPER  
POSITIONS; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 4 MM<sup>2</sup>; CAGE  
CLAMP®; 4,00 MM<sup>2</sup>; GRAY**

Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Curent nominal: 16; A  
Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Open Tool Slot;  
Connectable conductor materials: Copper;  
Nominal cross-section: 4 mm<sup>2</sup>;  
Solid conductor: 0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
Numar total de conexiuni: 2;  
Total number of potentials: 1;  
Numar nivele: 1;  
Wiring type: Front-entry wiring;  
Latime: 5 mm / 0.197 inch;  
Inaltime from upper-edge of DIN-rail: 28.5 mm / 1.122 inch;  
Adancime: 101 mm / 3.976 inch;  
Design: horizontal;  
Tip montaj: DIN-35 rail;  
Marking level: Center marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,167; MJ  
Greutate: 12,3; g  
Product Group: 18 (X-COM-System);  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4044918975506;  
Customs tariff number: 85365080900;  
Pret: 16,36 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-1-conductor-disconnect-carrier-terminal-block-with-shield-contact-with-2-jumper-positions-for-din-rail-35-x-15-and-35-x-7-5-4-mm2-cage-clamp-4-00-mm2-gray-141953>