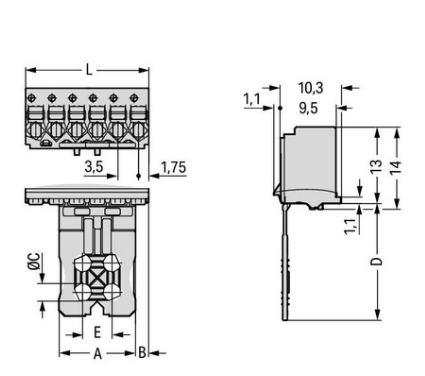


	<u>WAGO 1-CONDUCTOR FEMALE PLUG; GRIPPING PLATE; 1.5 MMÂ²; PIN SPACING 3.5 MM; 8-POLE; 1,50 MMÂ²; LIGHT GRAY</u> Ratings per: IEC/EN 60664-1; Tesiune nominala (III/3): 160; V Tesiune nominala de supratensiune (III/3): 2,5; kV Tesiune nominala (III/2): 160; V Tesiune nominala de supratensiune (III/2): 2,5; kV Tesiune nominala (II/2): 320; V Tesiune nominala de supratensiune (II/2): 2,5; kV Curent nominal: 10; A Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2; Tesiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tesiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Push-button; Solid conductor: 0,2 ... 1,5 mm² / 24 ... 14 AWG; Fine-stranded conductor: 0,2 ... 1,5 mm² / 24 ... 14 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 0,75 mm²; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1,5 mm²; Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch; Numar poli: 8; Numar total de conexiuni: 8; Total number of potentials: 8; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 3,5 mm / 0.138 inch; Latime: 28 mm / 1.102 inch; Inaltime: 33 mm / 1.299 inch; Adancime: 11,4 mm / 0.449 inch; Design: With gripping plate; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for conductor; Mismatching protection: No; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,094; MJ Greutate: 3,8; g Temperatura lucru: -60 ... +100 °C; Product Group: 26 (picoMAX); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821160724; Customs tariff number: 85366990990; Pret: 25,25 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/1-conductor-female-plug-gripping-plate-1-5-mm2-pin-spacing-3-5-mm-8-pole-1-50-mm2-light-gray-143159
--	--