


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

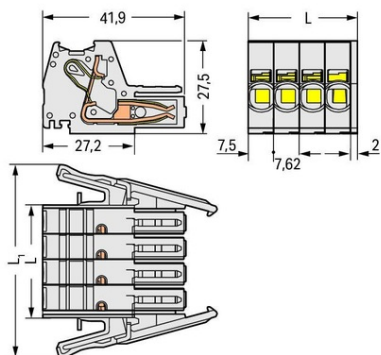

**WAGO 1-CONDUCTOR FEMALE PLUG; 100% PROTECTED AGAINST
MISMATING; LOCKING LEVER; 10 MM²; PIN SPACING 7.62 MM; 3-
POLE; 10,00 MM²; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 8; kV
Tensiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 8; kV
Curent nominal: 41; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 42; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group C): 600; V
Curent nominal CSA (Use Group C): 41; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
Fine-stranded conductor: 0,5 ... 10 mm² / 20 ... 8 AWG;
Fine-stranded conductor; with insulated ferrule: 0,5 ... 6 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 6 mm²;
Strip length: 13 ... 15 mm / 0.51 ... 0.59 inch;
Numar poli: 3;
Tehnologie conexiune 2: Quick-connect/Solder contact;
Numar total de conexiuni: 3;
Total number of potentials: 3;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 7,62 mm / 0.3 inch;
Latime: 49,54 mm / 1.95 inch;
Inaltime: 27,5 mm / 1.083 inch;
Adancime: 41,9 mm / 1.65 inch;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for conductors;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Culoare: light gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Material of the additional spring for socket contact: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 0,436; MJ
Greutate: 25,9; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4045454333881;
Customs tariff number: 85366990990;
Pret: 28,24 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-plug-100-protected-against-mismating-locking-lever-10-mm2-pin-spacing-7-62-mm-3-pole-10-00-mm2-light-gray-143515>