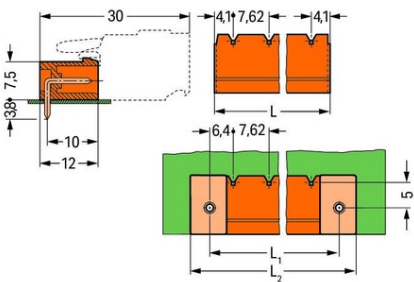


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Male Header. The side view shows a header with a total length of 30 mm, a mounting hole diameter of 3.8 mm, a hole offset of 7.5 mm, a hole diameter of 10 mm, and a hole depth of 12 mm. The top view shows a header with a total length of 61.54 mm, a hole diameter of 1.4 mm, a hole offset of 7.62 mm, a hole diameter of 6.4 mm, and a hole depth of 12.2 mm. The header is shown in orange and green colors.	WAGO THT MALE HEADER; 1.0 X 1.0 MM SOLDER PIN; ANGLED; PIN SPACING 7.62 MM; 8-POLE; ORANGE Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 500; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 12; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 10; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 10; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 8; Total number of potentials: 8; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7.62 mm / 0.3 inch; Latime: 61.54 mm / 2.423 inch; Inaltime: 12.2 mm / 0.48 inch; Inaltime de la fata: 8.4 mm / 0.331 inch; Adancime: 12 mm / 0.472 inch; Lungimea pinului de contact: 3,8; mm Solder pin dimensions: 1 x 1 mm; Diametrul de gaurire cu toleranta: 1.4 (+0.1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Solder pin arrangement: over the entire male connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,063; MJ Greutate: 3,1; g Temperatura lucru: -60 ... +100 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: PL; GTIN: 4044918868587; Customs tariff number: 85366990990; Pret: 11,52 lei (TVA inclus) Detalii online: https://www.materialelectrice.ro/tht-male-header-1-0-x-1-0-mm-solder-pin-angled-pin-spacing-7-62-mm-8-pole-orange-143751
--	--