


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

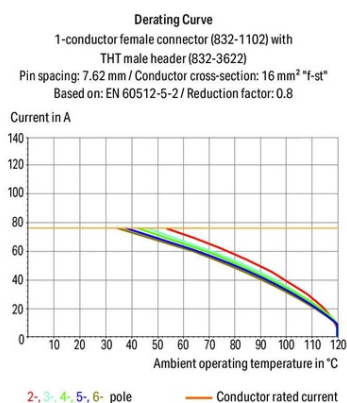

**WAGO 1-CONDUCTOR FEMALE PLUG; 100% PROTECTED AGAINST
MISMATING; LEVER; SILVER-PLATED CONTACTS; LOCKING LEVER;
16 MM²; PIN SPACING 10.16 MM; 5-POLE; 16.00 MM²; LIGHT
GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 1000; V
Tensiune nominala de supratensiune (III/3): 8; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 8; kV
Tensiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 8; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) â‰‰™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 600; V
Curent nominal UL (Use Group B): 66; A
Tensiune nominala UL (Use Group C): 600; V
Curent nominal UL (Use Group C): 66; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 600; V
Curent nominal CSA (Use Group B): 66; A
Tensiune nominala CSA (Use Group C): 600; V
Curent nominal CSA (Use Group C): 66; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Lever;
Solid conductor: 0,75 ... 16 mm² / 18 ... 4 AWG;
Fine-stranded conductor: 0,75 ... 25 mm² / 18 ... 4 AWG;
Fine-stranded conductor; with insulated ferrule: 0,75 ... 16 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,75 ... 16 mm²;
Strip length: 18 ... 20 mm / 0.71 ... 0.79 inch;
Numar poli: 5;
Numar total de conexiuni: 5;
Total number of potentials: 5;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 10,16 mm / 0.4 inch;
Latime: 64,1 mm / 2.524 inch;
Inaltime: 29,1 mm / 1.146 inch;
Adancime: 49,8 mm / 1.961 inch;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for conductor;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Culoare: light gray;
Material group: I;
Material izolator: Polybutylene terephthalate (PBT);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Material of the additional spring for socket contact: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: silver-plated;
Greutate: 66; g
Temperatura lucru: -60 ... +120 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143736800;
Customs tariff number: 85366990990;
Pret: 82,17 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-plug-100-protected-against-mismating-lever-silver-plated-contacts-locking-lever-16-mm2-pin-spacing-10-16-mm-5-pole-16-00-mm2-light-gray-143795>