


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

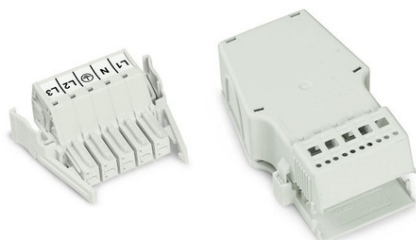

**WAGO SOCKET; WITH STRAIN RELIEF HOUSING; 5-POLE; COD. A;
6.00 MM²; WHITE**

Note on Contact Resistance: approx. 1 mΩ; of contact resistanceâ€© approx. 0.25 mΩ;,
contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 35; A
Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Operating tool; Push-in;
Nominal cross-section: 6 mm²;
Solid conductor: 0,5 ... 6 mm² / 20 ... 8 AWG;
Stranded conductor: 0,5 ... 4 mm² / 20 ... 12 AWG;
Fine-stranded conductor: 0,5 ... 6 mm² / 20 ... 8 AWG;
Strip length: 13 mm / 0.51 inch;
Note (strip length): see also packaging or instructions;
Numar poli: 5;
Numar total de conexiuni: 5;
Total number of potentials: 5;
Connectable sheathed cable diameter: 13 ... 18 mm;
Conductor entry direction to mating direction: 0; °
Distanta intre pini: 7,62 mm / 0.3 inch;
Latime: 64 mm / 2.52 inch;
Inaltime: 27,55 mm / 1.085 inch;
Adancime: 41,9 mm / 1.65 inch;
Coding: A;
Mating force of a plug-in connection: approx. 30 ... 70 N (depending on pole number);
Retention force of a plug-in connection: Locked: > 80 N;
Unmating force of a plug-in connection: when unlocked: approx. 30 ... 70 N (depending
on pole number);
Number of mating cycles: i»¿100, ohne ohmsche Last50, mit ohmscher Last IN = 35 A,
geprüft (6 mm²);
Marking: L1 N â‰‰ L2 L3;
Protection type: IP20;
Note on protection type: In mated condition with strain relief housing: IP2xC (These
compact connectors are not designed for use in open, easily accessible areas.);
Potential marking: L1 N â‰‰ L2 L3;
Application: General mains applications;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for conductor;
Mismating protection: Yes;
Locking of plug-in connection: locking lever;
Locking lever: retrofittable;
Strain relief: strain relief housing;
Culoare: white;
Material izolator: Polyamide 66 (PA 66);
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Copper or copper alloy (surface-treated);
Greutate: 74,4; g
Processing temperature: -5 ... +40 °C;
Continuous operating temperature: -35 ... +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4055143500753;
Customs tariff number: 85366990990;
Pret: 66,80 lei (TVA inclus)

Detalii online: <https://www.materialeelectric.ro/socket-with-strain-relief-housing-5-pole-cod-a-6-00-mm2-white-144028>