


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

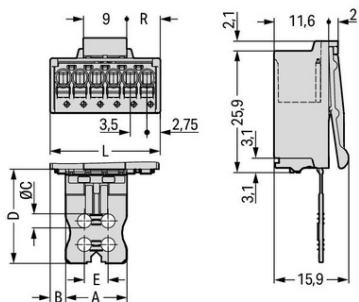

WAGO 1-CONDUCTOR MALE CONNECTOR; GRIPPING PLATE; 1.5 MM²; PIN SPACING 3.5 MM; 8-POLE; 1.50 MM²; LIGHT GRAY

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 160; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 10; A
 Legend (ratings): (III / 2) $\hat{=}$ %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Push-button;
 Solid conductor: 0,2 ... 1,5 mm² / 24 ... 14 AWG;
 Fine-stranded conductor: 0,2 ... 1,5 mm² / 24 ... 14 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 0,75 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1,5 mm²;
 Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
 Numar poli: 8;
 Numar total de conexiuni: 8;
 Total number of potentials: 8;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 3,5 mm / 0.138 inch;
 Latime: 30 mm / 1.181 inch;
 Inaltime: 15,9 mm / 0.626 inch;
 Adancime: 47 mm / 1.85 inch;
 Design: With gripping plate;
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for conductor;
 Mismatching protection: No;
 Locking of plug-in connection: Locking latch;
 Culoare: light gray;
 Material group: I;
 Material izolator: Polyphthalamide (PPA GF);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,188; MJ
 Greutate: 8,1; g
 Temperatura lucru: -60 ... +100 °C;
 Product Group: 26 (picoMAX);
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4050821161349;
 Customs tariff number: 85366990990;
 Pret: 34,62 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-gripping-plate-1-5-mm2-pin-spacing-3-5-mm-8-pole-1-50-mm2-light-gray-144272>