


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

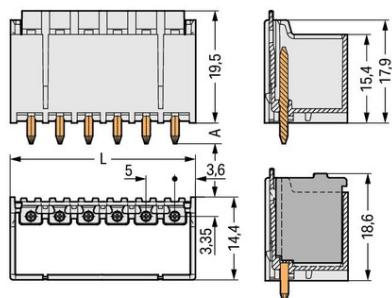

**WAGO THT MALE HEADER; 1.4 MM $\tilde{\sim}$ SOLDER PIN; STRAIGHT; PIN
SPACING 5 MM; 12-POLE; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 16; A
Legend (ratings): (III / 2) $\hat{\sim}$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 15; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Numar poli: 12;
Total number of potentials: 12;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 62,2 mm / 2.449 inch;
Inaltime: 23,1 mm / 0.909 inch;
Inaltime de la fata: 19,5 mm / 0.768 inch;
Adancime: 14,4 mm / 0.567 inch;
Lungimea pinului de contact: 3,6; mm
Diametrul pinului de contact: 1,4; mm
Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for PCB;
Mismatching protection: No;
Mating direction to the PCB: 90; °
Locking of plug-in connection: Locking latch;
PCB contact: THT;
Culoare: light gray;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,125; MJ
Greutate: 6,7; g
Temperatura lucru: -60 ... +100 °C;
Product Group: 26 (picoMAX);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4050821163909;
Customs tariff number: 85366990990;
Pret: 14,09 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/tht-male-header-1-4-mm-oe-solder-pin-straight-pin-spacing-5-mm-12-pole-light-gray-144307>