


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

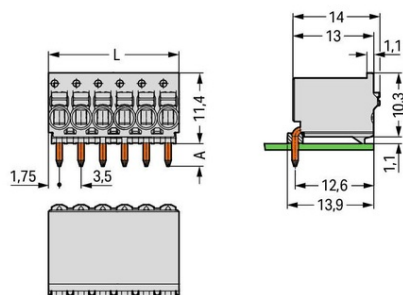

**WAGO 1-CONDUCTOR THT FEMALE HEADER; 1.0 MM  $\tilde{\sim}$  SOLDER  
PIN; ANGLED; GRIPPING PLATE; DIRECT MARKING; 1.5 MM $\tilde{\sim}$ ; PIN  
SPACING 3.5 MM; 3-POLE; 1,50 MM $\tilde{\sim}$ ; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 160; V  
Tensiune nominala de supratensiune (III/3): 2,5; kV  
Tensiune nominala (III/2): 160; V  
Tensiune nominala de supratensiune (III/2): 2,5; kV  
Tensiune nominala (II/2): 320; V  
Tensiune nominala de supratensiune (II/2): 2,5; kV  
Curent nominal: 10; A  
Legend (ratings): (III / 2)  $\hat{\sim}$ ™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tehnologie conexiune: Push-in CAGE CLAMP®;  
Tip actionare: Push-button;  
Solid conductor: 0,2 ... 1,5 mm $\tilde{\sim}$  / 24 ... 14 AWG;  
Fine-stranded conductor: 0,2 ... 1,5 mm $\tilde{\sim}$  / 24 ... 14 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 0,75 mm $\tilde{\sim}$ ;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1,5 mm $\tilde{\sim}$ ;  
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
Conductor connection direction to PCB: 0; °  
Numar poli: 3;  
Numar total de conexiuni: 3;  
Total number of potentials: 3;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanța între pini: 3,5 mm / 0.138 inch;  
Latime: 10,5 mm / 0.413 inch;  
Inaltime: 11,4 mm / 0.449 inch;  
Adancime: 30 mm / 1.181 inch;  
Lungimea pinului de contact: 3,6; mm  
Diametrul pinului de contact: 1; mm  
Diametrul de gaurire cu toleranta: 1,2 (+0,1) mm;  
Design: With gripping plate;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for PCB;  
Mismating protection: No;  
Mating direction to the PCB: 0; °  
PCB contact: THT;  
Culoare: light gray;  
Material group: I;  
Material izulator: Polyphthalamide (PPA GF);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,038; MJ  
Greutate: 1,8; g  
Temperatura lucru: -60 ... +100 °C;  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4050821365150;  
Customs tariff number: 85366990990;  
Pret: 14,63 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-tht-female-header-1-0-mm-oe-solder-pin-angled-gripping-plate-direct-marking-1-5-mm2-pin-spacing-3-5-mm-3-pole-1-50-mm2-light-gray-144552>