


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

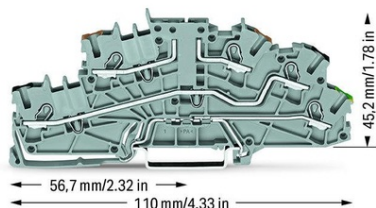

WAGO MULTILEVEL INSTALLATION TERMINAL BLOCK; 4 MM²;
CARRIER TERMINAL BLOCK WITHOUT KNIFE; P1/P2/PE; BROWN
UPPER-DECK; BLACK MIDDLE-DECK; GREEN-YELLOW LOWER DECK;
PUSH-IN CAGE CLAMP®; 2,50 MM²; GRAY

Ratings (note): Potential - ground;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Curent nominal: 10; A
Ratings (note) 2: Potential - potential;
Tensiune nominala (III/3) 2: 400; V
Tensiune nominala de supratensiune (III/3) 2: 6; kV
Legend (ratings): (III / 3) à‰™ Overvoltage category III / Pollution degree 3;
Tensiune nominala UL (Use Group B): 250; V
Curent nominal UL (Use Group B): 6,3; A
Tensiune nominala UL (Use Group C): 250; V
Curent nominal UL (Use Group C): 6,3; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group C): 300; V
Curent nominal CSA (Use Group C): 20; A
Tehnologie conexiune: Push-in CAGE CLAMP®;
Tip actionare: Push-in; Open Tool Slot;
Connectable conductor materials: Copper;
Nominal cross-section: 2,5 mm²;
Solid conductor: 0,25 ... 4 mm² / 22 ... 12 AWG;
Solid conductor; push-in termination: 0,75 ... 4 mm² / 18 ... 12 AWG;
Fine-stranded conductor: 0,25 ... 4 mm² / 22 ... 12 AWG;
Fine-stranded conductor; with insulated ferrule: 1 ... 2,5 mm² / 18 ... 12 AWG;
Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2,5 mm² / 18 ... 12 AWG;
Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;
Numar total de conexiuni: 5;
Total number of potentials: 3;
Numar nivele: 3;
Wiring type: Front-entry wiring;
Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.;
Latime: 5,2 mm / 0.205 inch;
Inaltime from upper-edge of DIN-rail: 45,2 mm / 1.78 inch;
Adancime: 110 mm / 4.331 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Potential marking: P1/P2/PE;
Marking level: Center/side marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Fire load: 0,309; MJ
Greutate: 19,9; g
Tip ambalare: BOX;
Tara de origine: CN;
GTIN: 4055143053501;
Customs tariff number: 85369010000;
Pret: 23,16 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/multilevel-installation-terminal-block-4-mm2-carrier-terminal-block-without-knife-p1-p2-pe-brown-upper-deck-black-middle-deck-green-yellow-lower-deck-push-in-cage-clamp-2-50-mm2-gray-144867>