


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

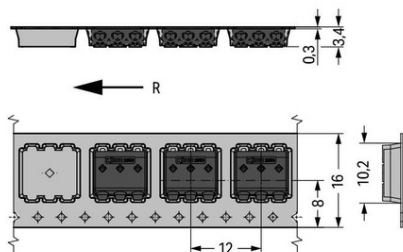

**WAGO SMD PCB TERMINAL BLOCK; 0.5 MM<sup>2</sup>; PIN SPACING 3 MM;  
3-POLE; PUSH WIRE®; IN TAPE-AND-REEL PACKAGING; 0,50  
MM<sup>2</sup>; BLACK**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 63; V  
Tensiune nominala de supratensiune (III/3): 2,5; kV  
Tensiune nominala (III/2): 160; V  
Tensiune nominala de supratensiune (III/2): 2,5; kV  
Tensiune nominala (II/2): 320; V  
Tensiune nominala de supratensiune (II/2): 2,5; kV  
Curent nominal: 3; A  
Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2;  
Certificari: UL 1059;  
Tensiune nominala UL 1977: 250; V  
Curent nominal UL 1977: 3; A  
Tehnologie conexiune: PUSH WIRE®;  
Tip actionare: Operating tool;  
Solid conductor: 0,14 ... 0,34 mm<sup>2</sup> / 26 ... 22 AWG;  
Strip length: 4 ... 5,5 mm / 0.16 ... 0.22 inch;  
Conductor connection direction to PCB: 0; °  
Numar poli: 3;  
Solid conductor 2: 0,5 mm<sup>2</sup> / 20 AWG;  
Note (conductor cross-section) 2: No reconnection of smaller conductor cross-sections  
(0.5 mm<sup>2</sup>/20 AWG);  
Strip length 2: 6 ... 7,5 mm / 0.24 ... 0.3 inch;  
Numar total de conexiuni: 3;  
Total number of potentials: 3;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Note (conductor cross-section): For conductors (26 AWG) that are not rigid enough, the  
clamping unit must be opened using an operating tool.;  
Distanta intre pini: 3 mm / 0.118 inch;  
Latime: 8,9 mm / 0.35 inch;  
Inaltime: 2,7 mm / 0.106 inch;  
Adancime: 7,9 mm / 0.311 inch;  
Reel diameter of tape-and-reel packaging: 330; mm  
Tape Latime: 16; mm  
PCB contact: SMD;  
Culoare: black;  
Material group: I;  
Material izolator: Polyphthalamide (PPA GF);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Copper alloy;  
Contact plating: tin-plated;  
Fire load: 0,004; MJ  
Greutate: 0,2; g  
Temperatura lucru: -60 ... +105 °C;  
Tip ambalare: BOX;  
Tara de origine: CH;  
GTIN: 4055143476515;  
Customs tariff number: 85369010000;  
Pret: 4,18 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/smd-pcb-terminal-block-0-5-mm2-pin-spacing-3-mm-3-pole-push-wire-in-tape-and-reel-packaging-0-50-mm2-black-150812>