


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

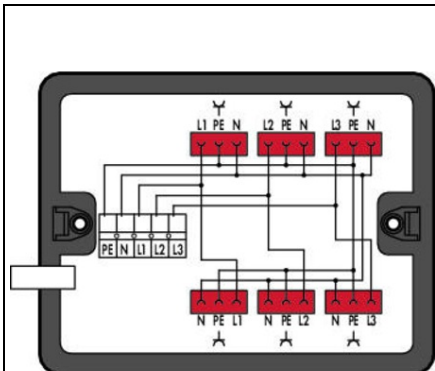

**WAGO DISTRIBUTION BOX; THREE-PHASE TO SINGLE-PHASE
CURRENT (400 V/230 V); SUPPLY CABLE ENTRY; 1 INPUT; 6
OUTPUTS; COD. P; MIDI; BLACK**

Note on Contact Resistance: approx. 1 mΩ; of contact resistanceâ€© approx. 0.25 mΩ;,
contact transition plug/socket;
Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 25; A
Tensiune nominala (III/3) 2: 250; V
Tensiune nominala de supratensiune (III/3) 2: 4; kV
Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;
Latime: 190 mm / 7.48 inch;
Inaltime: 30 mm / 1.181 inch;
Adancime: 145 mm / 5.709 inch;
Interne Verdrahtung: 4; mm²
Coding: P;
Tip montaj: Wall, screw mount; Installation on mounting plate;
Protection type: IP20;
Note on protection type: Only when mated (these compact connectors are not designed
for use in open, easily accessible areas).;
Mismatching protection: Yes;
Locking of plug-in connection: locking lever;
Culoare: black;
Material izolator: Polyamide 66 (PA 66);
Contact material: Copper or copper alloy (surface-treated);
Greutate: 440; g
Processing temperature: -5 ... +40 °C;
Continuous operating temperature: -35 ... +85 °C;
Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143305129;
Customs tariff number: 85366990990;
Pret: 312,54 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/distribution-box-three-phase-to-single-phase-current-400-v-230-v-supply-cable-entry-1-input-6-outputs-cod-p-midi-black-151174>