


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

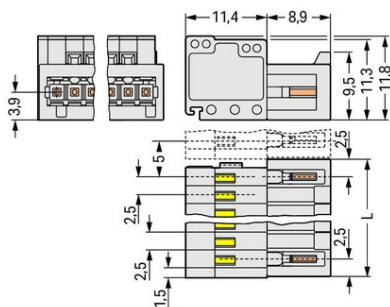

WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED AGAINST MISMATING; STRAIN RELIEF PLATE; 0.5 MM²; PIN SPACING 2.5 MM; 5-POLE; 0.50 MM²; LIGHT GRAY

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 100; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 6; A
 Legend (ratings): (III / 2) 2%™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 150; V
 Curent nominal UL (Use Group B): 4; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 150; V
 Curent nominal CSA (Use Group B): 4; A
 Tehnologie conexiune: CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0.08 ... 0.5 mm² / 28 ... 20 AWG;
 Fine-stranded conductor: 0.08 ... 0.5 mm² / 28 ... 20 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 0.34 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 0.34 mm²;
 Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
 Numar poli: 5;
 Numar total de conexiuni: 5;
 Total number of potentials: 5;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Conductor entry direction to mating direction: 0°;
 Distanta intre pini: 2.5 mm / 0.098 inch;
 Latime: 15 mm / 0.591 inch;
 Inaltime: 11.8 mm / 0.465 inch;
 Adancime: 20.3 mm / 0.799 inch;
 Tip contact (pluggable connector): Conector tata/fisa;
 Conector (connection type): for conductors;
 Mismating protection: Yes;
 Culoare: light gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolytic (ECu);
 Contact plating: tin-plated;
 Fire load: 0.061; MJ
 Greutate: 3; g
 Temperatura lucru: -60 ... +100 °C;
 Product Group: 3 (Multi Conn. System);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4044918849883;
 Customs tariff number: 85366990990;
 Pret: 22,27 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismatching-strain-relief-plate-0-5-mm2-pin-spacing-2-5-mm-5-pole-0-50-mm2-light-gray-151516>