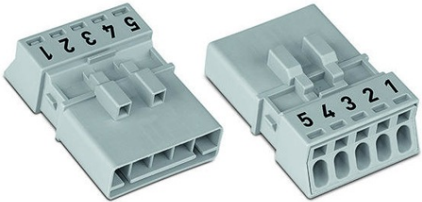


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	WAGO PLUG; 5-POLE; 1,50 MMÂ²; PINK Note on Contact Resistance: approx. 1 mΩ; of contact resistanceâ€© approx. 0.25 mΩ;, contact transition plug/socket; Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 400; V Tensiune nominala de supratensiune (III/3): 6; kV Curent nominal: 16; A Note on Curent nominal: 13 A for 3-pole load 10 A for 4- and 5-pole load; Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 12; A Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Operating tool; Push-in; Nominal cross-section: 1,5 mm²; Solid conductor: 0,25 ... 1,5 mm² / 22 ... 16 AWG; Solid conductor; push-in termination: 0,75 ... 1,5 mm² / 20 ... 16 AWG; Stranded conductor: 0,25 ... 1 mm² / 22 ... 18 AWG; Fine-stranded conductor: 0,25 ... 1,5 mm² / 22 ... 16 AWG; Fine-stranded conductor; with insulated ferrule: 0,25 ... 0,75 mm² / 22 ... 20 AWG; Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 0,75 mm² / 22 ... 20 AWG; Fine-stranded conductor; with ferrule; push-in termination: 0,75 mm² / 20 AWG; Strip length: 9 mm / 0.35 inch; Note (strip length): see also packaging or instructions; Numar poli: 5; Numar total de conexiuni: 5; Total number of potentials: 5; Conductor entry direction to mating direction: 0; ° Distanta intre pini: 4,4 mm / 0.173 inch; Latime: 23,6 mm / 0.929 inch; Inaltime: 11,7 mm / 0.461 inch; Adancime: 34,1 mm / 1.343 inch; Coding: B; Mating force of a plug-in connection: approx. 20 ... 70 N (depending on pole number); Retention force of a plug-in connection: Locked: > 80 N; Unmating force of a plug-in connection: Unlocked: approx. 20 ... 70 N (depending on pole number); Number of mating cycles: î»¿200, without resistive load100, with resistive load IN = 16 A, tested (1.5 mm²/16 AWG); Marking: 1 2 3 4 5; Protection type: IP20; Note on protection type: IP40 when mated with strain relief housing; Potential marking: 1 2 3 4 5; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for conductor; Mismating protection: Yes; Locking of plug-in connection: locking lever; Locking lever: retrofittable; Culoare: pink; Material izolator: Polyamide 66 (PA 66); Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper or copper alloy (surface-treated); Fire load: 0,12; MJ Greutate: 5,5; g Processing temperature: -5 ... +40 °C; Continuous operating temperature: -35 ... +85 °C; Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C; Product Group: 20 (WINSTA); Tip ambalare: BOX; Tara de origine: PL; GTIN: 4055143499781; Customs tariff number: 85366990990; Pret: 18,45 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/plug-5-pole-1-50-mm2-pink-151745
---	--