


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

ERSE CABLU RE-2X(ST)H-PIMF 12 X 2 X 1.3, ERSE

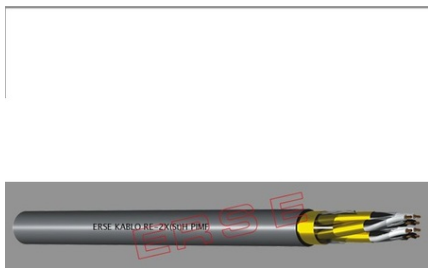

Construc?ie

1. CONDUCTOR IEC-60228, VDE 0295, EN 60228
2. IZOLARE EN 50290-2-29 XLPE
3. Codul culorilor BS-5308 PARTEA-1 sau negru-alb
- Fiecare pereche numerotate
6. Placarea cu band? de PES
7. GENERAL SCREEN cupru cositorit DRAIN fir; TAPE AL-PES
8. MANTAUA EN 50290-2-27 LZSH COMBIMATE
9. MANTAUA CULOARE RAL 5015 * BLUE; RAL 7001 GERY *
RAL 9005 BLACK

CARACTERISTICI

- RETARDANT flac?r? ?i
- REZISTENT LA HIDROCARBURI

- Raza de ?ndoire MICI

- Fumigen

- F?R? otrav? si

- Gaze COROZIVE

- RAL 5015 MANTA BLUE *: IN exploziv ?i izbucneasc?

- Locuri ca EX-DOVADA

CONECTAREA

- RAL 9005 BLACK MANTA *: Locuri in care rezistenta UV

- ESTE NECESAR?

- RAL 7001 GREY MANTA *: INTERIORUL CL?DIRILOR

Caracteristici tehnice

1. Rezisten?a conductorului 0,50 mm² = 36 OHM / km
0,75 mm² = 24.5 OHM / km
1,0 mm² = 18.1 OHM / km
1.30 mm² = 13.9 OHM / km
1,5 mm² = 12.1 OHM / km
2. Rezisten?a de izola?ie (MIN) 5000 m OHMXKm
3. CAPACITATE MUTUAL (MAX) 0,50 mm² = 100 pF / m
0,75 mm² = 100 pF / m
1,0 mm² = 100 pF / m
1,30 mm² = 100 pF / m
1,5 mm² = 100 pF / m
4. Gam? de temperatur? - 30 ° C ~ +90 ° C (de stabilire a fixe)
5. L / R (raport) (MAX) 0.50 mm² = 25 mH / OHM
0,75 mm² = 25 mH / OHM
1,0 mm² = 25 mH / OHM
1.30 mm² = 40 mH / OHM
1,5 mm² = 40 mH / OHM
6. Curentul de sarcin? (25 ° C) 0.50 mm² = 6,0 A
0,75 mm² = 13 A
1,0 mm² = 16 A
1,30 mm² = 18 A
1,5 mm² = 20 A

- 7. Tensiunea de lucru 300/500 V.

- 8. TEST VOLTAJGE Core / Core = 2,000 V.

- Core / Ecran = 2,000 V.

- 9. Raza de ?ndoire 7.5X cablu Ø

- 10. FLACARA TEST IEC 60332-3-24; VDE 0482-266-2-4

- RO 50266-2-4/BS EN 50266-2-4

- 11. FUM DENSITATE IEC 61034-2/VDE 0482-1034-2

- RO 61034-2/BS EN 61034-2

- 12. Test pe corozivitatea gaze de ardere IEC 60754-2/VDE 0482-267-2-3

- RO 50267-2-3/BS EN 50267-2-3

- 13. TEST f?r? halogen CE 60754-1, VDE 0482-267-2-1

- RO 50267-2-1/BS EN 50267-2-1

Cerere

Medii de interior INTENS populat de oameni atunci cand exista interferen?e electromagnetice.

- 1. INSTRUMENTATION SI CONTROL ENGINEERING ANALOG

- ?I transmitere a semnalului digital

- Rafin?riile 2. PETROLEUM

- INDUSTRIA 3. PETROCHEMISTRY

- PLANTE 4. POWER

- 5. NATURAL sta?ii de pompare GAZ

- LOCURI 6. DRY-umede ?i umede, LA INTERIOR

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/cablu-re-2x-st-h-pimf-12-x-2-x-1-3-erse>