


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

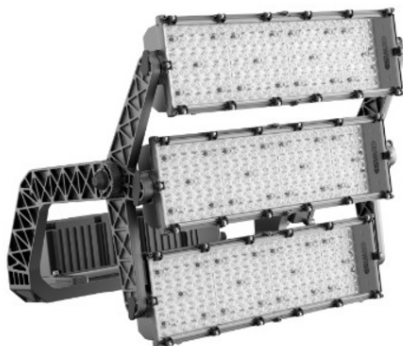

GEWISS PROJECTOR STADIUM PRO - 3 MODULE - CIRCULAR OPTIC
10Å° - CRI 90 5700K - IP66 - CLASS I

GENERAL INFORMATION - -
OPTIC AND ILLUMINATING FEATURES - -
Context - Professional sport lighting
OpticÅf - Circular 10°
Luminaire - High power LED floodlight
Unified Glare Rating - ULOR = 0%
AplicaÅfie - Intern / Extern
LuminÅfieÅyire (lm) - 129000
Unique digital code (Datamatrix) - Currently not present
Efficiency
(lm/W) - 89
Culoare - Gri grafit
Culoare TemperaturÅf - 5700 K
Tip sursÅf de luminÅf - LED - Neinlocuibil
Color Rendering Index - CRI>90 TLCI>80
Puterea sistemului - 1450 W
Standard Deviation Colour Matching - SDCM = 3
LED Lifetime - L90B10(Tq25°C)=40.000h; L80B10(Tq25°C)=75.000h
Photobiological Risk Class - -
Greutate (Kg) - 32
Standard - EN60598-1; EN60598-2-5; IEC 62471; IEC 62778
GaranÅfie - 5 ani
ELETRICAL AND LIGHTING FEATURES - -
TemperaturÅf de stocare - -
Tensiune de alimentare - See external supply unit
Operating temperature - -25 +50 °C
FrecvenÅf nominalÅf (Hz) - See external supply unit
MATERIALS - -
Driver - To be ordered separately
Body - Aluminiu turnat
Driver failure rate - See external supply unit
Ecran - Flat tempered glass 4mm
Overvoltage protection - See external supply unit
Optic - T.I.R.Ex. Optical PMMA HT
Control System - See external supply unit
Gasket - Anti-aging silicone
INSTALLATION AND MAINTENANCE - -
Locking Hook - -
Mounting and installation - Lighting tower - Surface
External screw - Stainless steel
Tilt - Rotation on bracket with integrated goniometer
Colour - Polyester powder coated
Wiring - Multipolar cable between floodlight and power supply
STANDARDS AND APPROVALS - -
Prindere - ConsolÅf
Clasificare - -
Optic Maintenance - Not available
Dispozitiv cu temperaturÅf la suprafaÅf redusÅf - -
LED Maintenance - Da
Certificare DIN 18032-3 - -
Driver Box - Exterior
IPEA - -
SuprafaÅf maximÅf expusÅf la vant - 0,36 m²
ClasÅf izolaÅfie - I
- - -
ClasÅf de protecÅfie IP - IP66
- - -
Cod IK - IK08
- - -
Glow Test conductori - -
- - -
Ware number - 94054010
Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/proiector-stadium-pro-3-module-circular-optic-100-cri-90-5700k-ip66-class-i-215719>