


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

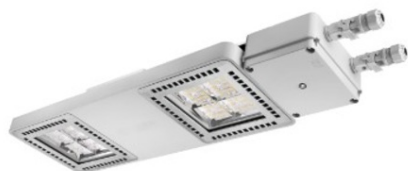

**GEWISS CORP DE ILUMINAT CU LED SMART [4] - HLO - 2 MODULE -
EMERGENCY - 1 X DALI DT6 + 1 X DALI DT1 (EMERG. 3H) - 30°
OPTIC - 5700 K - IP65 - CLASS I**

GENERAL INFORMATION - -
OPTIC AND ILLUMINATING FEATURES - -
Context - Lighting for industries and sports facilities
Optic - 30°
Luminaire - LED Industrial Reflector
Unified Glare Rating - $UGR \leq 19$
Aplicatie - Intern
Lumen
output (lm) - 17600 (850 Emerg.)
Unique digital code (Datamatrix) - Datamatrix
Efficiency
(lm/W) - 135
Culoare - Gri RAL 7035
Culoare Temperatur - 5700 K
Tip surs de lumin - LED - Neînlocuibil
Color Rendering Index - $CRI > 80$
System
power - 125 W (+5W Emerg.)
Standard Deviation Colour Matching - $SDCM = 3$
LED Lifetime - $L90B10(Tq25^{\circ}C) > 150.000h$; $L90B10(Tq40^{\circ}C) = 140.000h$
Photobiological Risk Class - RG0
Greutate (Kg) - 8
Standard - EN 60598-2-22 ; EN 60598-1 ; EN 60598-2-24
Garan - 5 ani
ELECTRICAL AND LIGHTING FEATURES - -
Temperatur de stocare - $-40 + 70^{\circ}C$
Tensiune de alimentare - 220 - 240 V
Operating temperature - $0 \div +40^{\circ}C$
Frecven nominal (Hz) - 50/60 Hz
MATERIALS - -
Driver - Included
Body - PA6 "Halogen Free" loaded fibreglass
Driver failure rate - $F10 = 100.000h Tq25^{\circ}C / 50.000h Tq40^{\circ}C$
Ecran - Tempered glass Thickness 4mm
Overvoltage protection - DM 6 kV / CM 10 kV
Optic - Metallic PC reflector and PMMA lenses
Control System - 1 x DALI DT6 + 1 x DALI DT1 (Emerg. 3h)
Gasket - anti-aging silicone
INSTALLATION AND MAINTENANCE - -
Locking Hook - -
Mounting and installation - Ceiling light - Suspension
External screw - Oel
Tilt - -
Colour - Gri RAL 7035
Wiring - With GW connect watertight connector
STANDARDS AND APPROVALS - -
Prindere - -
Clasificare - -
Optic Maintenance - Non-replaceable
Dispozitiv cu temperatur la suprafata redus - Da
LED Maintenance - NiMh Battery Only
Certificare DIN 18032-3 - -
Driver Box - Integrat
IPEA - -
Suprafata maxim expus la vant - 0,220 m²
Clas izolatie - I
- - -
Clas de protectie IP - IP65
- - -
Cod IK - IK08
- - -
Glow Test conductori - 850 °C
- - -
Ware number - 94051098
Pret: 3 978,29 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/corp-de-iluminat-cu-led-smart-4-hlo-2-module-emergency-1-x-dali-dt6-1-x-dali-dt1-emerg-3h-300-optic-5700-k-ip65-class-i-217136>