

Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410



ATM LIGHTING CORP DE ILUMINAT PENTRU UZ INDUSTRIAL INS 230 LED 29W

Corp de iluminat LED pentru uz industrial, rezistent la apa si praf caracterizat prin dispersorul de lumina din policarbonat rezistent UV.

Materiale folosite:

Carcasa: policarbonat rezistent UV

Dispersor: policarbonat stabilizat UV

Placa de montaj: tabla de otel galvanizat

Cleme fixare: otel inoxidabil

Grad de protectie UV++

Caracteristici tehnice :

Putere LED: 29W

Flux luminos : 3180 lm

Eficienta luminoasa: 110 lm/W

Sursa de iluminat: LED

Clasa de protectie modul: I

Grad de protectie: IP66, IP67

CRI: >80;

Factor de putere: $\geq 0,95$

Durata de via: $\geq 50.000h$ L70B10

Temperatura de culoare: 4000K

Temperatura mediului ambiant: de la -25 ° C până la + 45 ° C

Montaj: pe tavan sau pe perete

Tensiune de alimentare: 230V

Inlocuitor T8: 2x36W

Analiza comparativa:


INS 230 LED 29W - economie de 63% fata de inlocuitorul T8

INS 230 LED 29W - economie de 46% a retelei electrice

* Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard


** Economie de consum energetic comparativ cu alti producatori de corpuri de iluminat T8 standard presupunand un flux luminos egal al dispozitivelor comparate

Dimensiuni:

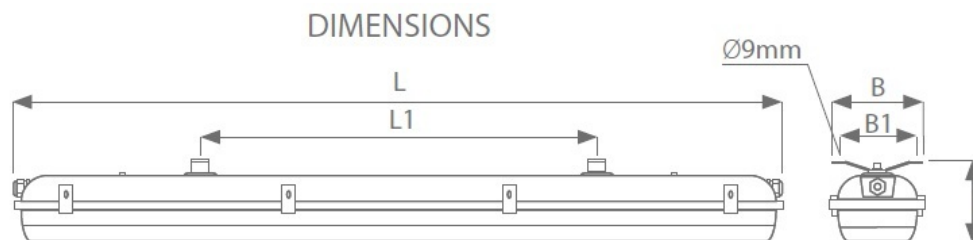

TYPE	L	L1	B	B1	H
INS230LED-0600	673	450	190	160	134
INS230LED-1200	1283	660	190	160	134

Distributie luminoasa:

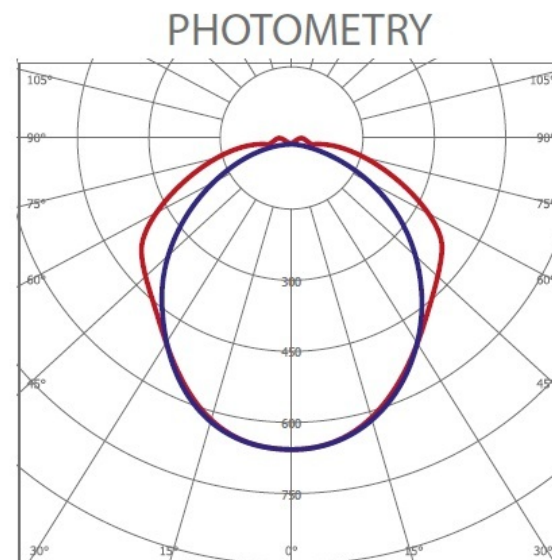

	Pret: 1 327,08 lei (TVA inclus)
	Detalii online: https://www.materialeelectrice.ro/atm-lighting-ins-230-led-29w