


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

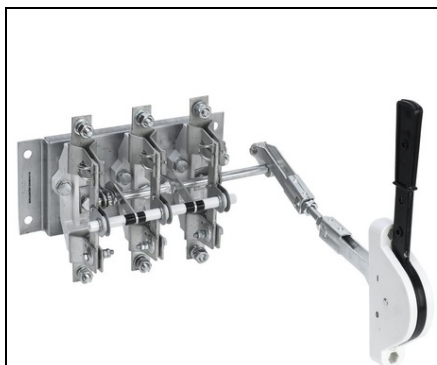

IEK SEPARATOR DISCONNECTOR PE19-37-31140 400A

The disconnectors of RE-19 series are designed for conducting the rated current and not frequent non-automatic switching of circuits without load of rated voltage up to 1000 VAC and frequency 50, 60 Hz. RE-19 IEK can be used in switchgears with rated currents from 250 to 1600 A. Convenient installation and operation.
Low power losses due to use of high-quality materials.

Visible circuit gap.

Wide range of control handles.

Copper and aluminum conductors can be connected. Rated permanent current I_u : 400

Max. rated operation voltage U_e AC: 660

Conditioned rated short-circuit current I_q : 26

Number of poles: 3

Device construction: EV009211

Type of control element: EV004094

Connection type main current circuit: EV008864

Degree of protection (IP), front side: EV006404

Degree of protection (IP): EV006404

Rated insulation voltage U_i : 660

Rated operating voltage U_e : 660

Nominal operating voltage U_e -DC-20 V: 440

Manual actuator handle type: IEK_V0000053

Pret: 1 026,26 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/separator-disconnector-pe19-37-31140-400a-307757>