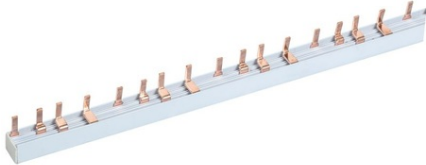


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p style="text-align: center;"><u>IEK BUSBAR PIN TYPE 4P 100A (1 M)</u></p> <p>Bridging bars are applied for convenient and safe connection of various groups: VA (MCBs), AD (RCBOs), VD (RCCBs) and VN (modular disconnectors). Buses with 18mm step are intended for commuting one-modulefold wide equipment; 27 mm step buses are designed for 1,5 module-fold wide devices. Buses are optimized per rated current of 100 A but can be used with rated current of 125 A if the incoming switch is connected on the center. There are plugs intended for 1,5 module wide buses. Made of copper plates and placed in a plastic insulating flame-retardant housing. Can be used with a rated current of 125A, if the input machine is connected in the center. Maximum number of connected devices: 56 Pitch dimensions: 18 Cross section: 601 Length: 1000 Rated permanent current Iu: 100 Type of electric connection: EV000158 Rated surge voltage: 4 Rated short-time withstand current Icw: 15 Height: 37.5 Width: 23.6 Number of poles (total): 4 Nominal voltage: 230/400 Weight: 1 Ambient temperature: -45...+40 Rated insulation voltage Ui: 600 Number of phases: 4 Pret: 473,12 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/busbar-pin-type-4p-100a-1-m-309207</p>
--	--