


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

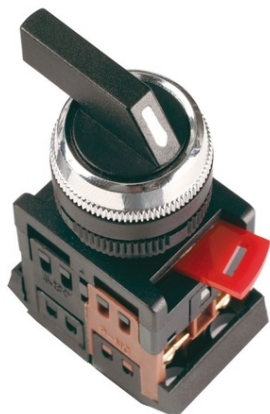

**IEK SELECTOR ALC-22 PENTRU 2 FIXED POSITIONS WITH A LONG
HANDLE I-O 1C+1R**

Control buttons and switches are designed for an operative management of contactors (automatic tripping contactors) and automatics relay within AC electric circuits of 50 Hz and voltage limited to 600 V or DC circuits limited to 400 V and other technological processes. Various color variants provide for the most efficient arrangement of panels and boards. All devices consist of two units: removable head and contact module. Black NO contact block (1NO) and brown NC unit (1NC). Low cost, high reliability and ease of installation.

The wide range allows to complete a case of any complexity. Number of poles: 1

Max. rated operation voltage U_e AC: 660

Rated permanent current I_u : 7.5

Number of switch positions: 2

Device construction: EV002104

Type of control element: EV004094

Degree of protection (IP), front side: EV006415

Number of auxiliary contacts as normally open contact: 1

Connection type main current circuit: EV000415

Number of auxiliary contacts as normally closed contact: 1

Rated insulation voltage U_i : 660

Nominal heat current I_{th} : 10

Rated operation current I_e at AC-15, 230 V: 7,5

Nominal operating current I_e at AC-15 400V: 4,5

Electric wear resistance: 0,3

Degree of Protection - IP Side of Contacts: EV006404

Ambient temperature: -10...+40

Nominal operating voltage AC contacts: 110; 230; 400; 660

Nominal operating voltage DC contacts: 24; 48; 110; 220; 440

Diameter openings: 22.0

Nominal voltage DC: 440

Nominal Attachment Capacity: 2 \tilde{N} ...2,5

Width: 30.0

Height: 50.0

Depth: 87.0

Type of switch: EV009208

Pret: 16,72 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/selector-alc-22-pentru-2-fixed-positions-with-a-long-handle-i-o-1c-1r-312247>