


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

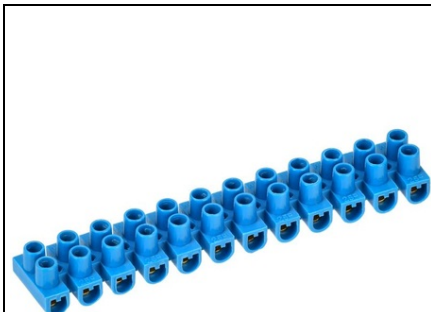

IEK CLEME SIR ZVI-3 1,0-2,5 MM2 2X12STEAM ALBASTRU

Applied for screw connection of conductors, protecting wires from damage and excluding possibility of short circuit to the frame of electric unit. Insulation frame is made of white non-flammable polystyrene or transparent polyethylene. Terminal block and screws - latten alloy. Protection of the wire from damage and exclusion of the possibility of a short circuit to the housing of the electrical installation.

Fire-retardant housing.

Retail pack. Connectable conductor cross section solid-core: 1,0...2,5

Connectable conductor cross section multi-wired: 1,0...2,5

Rated current In: 3

Nominal rated voltage: 400

Type of electrical connection 2: EV000415

Connection position: EV001224

Number of poles: 12

Number of clamp positions per pole: 2

Mounting method: EV005276

Material insulation body: EV003904

Operation temperature: -25...+110

Width/grid dimension: 16.0

Length: 92

Colour: EV000080

Rated insulation voltage Ui: 450

Material clamp: EV000149

Material housing: EV003904

Ambient class: IEK V0000067

Degree of protection (IP): EV006404

Width: 16

Height: 11

Allowable long-term current: 3

Tightening torque Nm at conductor section: 0,8

Max operating voltage Ue: 400

Quantity in the kit: 2

Type of electrical connection 1: EV000415

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/cleme-sir-zvi-3-1-0-2-5-mm2-2x12steam-albastru-312953>